

WAAS CH 53733 W36A	APP CRS 005°	Rwy Ldg TDZE Apt Elev	5108 624 624
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 36
CHERRY CAPITAL (TVC)

RNP APCH - GPS.

⚠ Baro-VNAV NA when using ACB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received use ACB altimeter setting: increase all DA 51 feet and all MDA 60 feet, increase LNAV/VNAV all Cats and Circling Cat C visibilities ¼ SM, and increase LPV all Cats, LNAV Cat C/D and Circling Cat D visibilities ⅓ SM. Helicopter visibility reduction below ⅓ SM NA.

MISSED APPROACH:
Climb to 1400 then climbing right turn to 3000 direct TIDDU and hold.

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER ★ 124.2(CTAF) 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

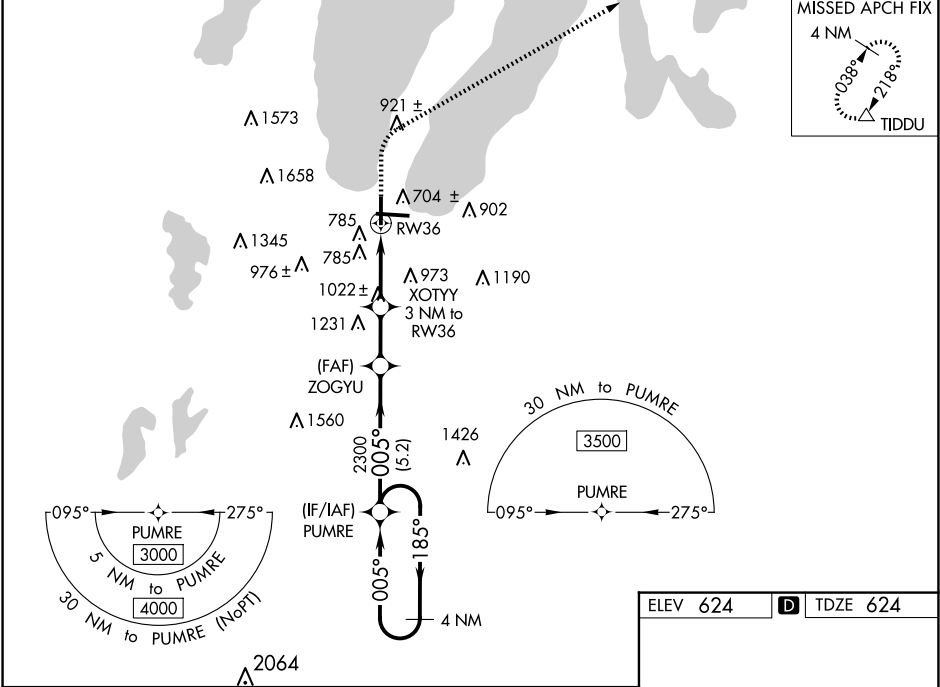

4 NM VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 53). Holding Pattern				1400	3000	TIDDU
3000 ← 185° → 005° → 005° → 2300				XOTYY 3 NM to RW36		
GP 3.00° TCH 48				RW36		
5.2 NM				2.1 NM		
3 NM				3 NM		
CATEGORY	A	B	C	D		
LPV DA	899-7/8		275 (300-7/8)			
LNAV/VNAV DA	1146-1 3/4		522 (600-1 3/4)			
LNAV MDA	1280-1	656 (700-1)	1280-1 7/8	656 (700-1 7/8)		
CIRCLING	1280-1	656 (700-1)	1500-2 1/2 876 (900-2 1/2)	1720-3 1096 (1100-3)		

