
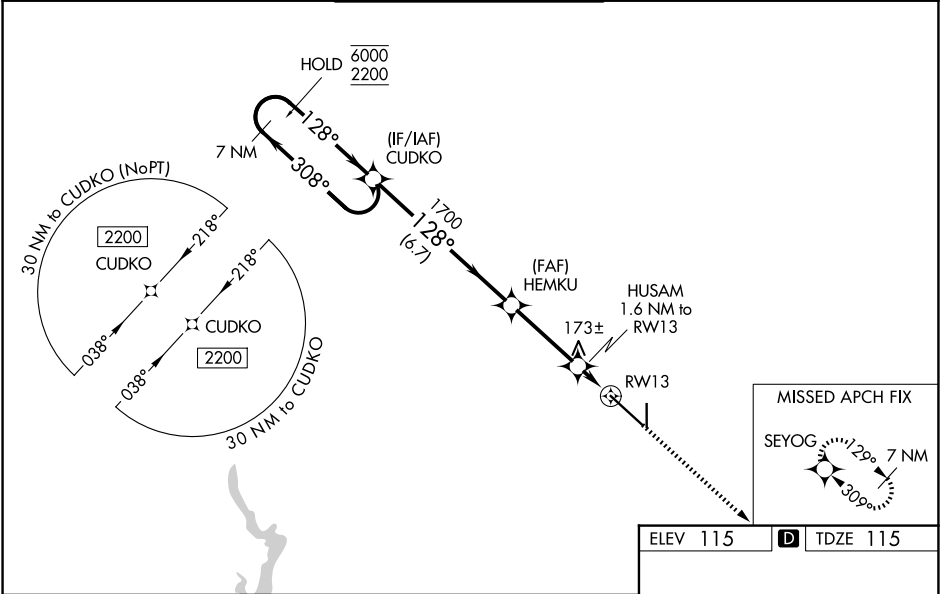


WAAS CH 86245 W13A	APP CRS 128°	Rwy Ldg 9111 TDZE 115 Apt Elev 115
--	------------------------	---

RNAV (GPS) RWY 13

VICTORIA RGNL (VCT)

RNP APCH-GPS.				<div>MALSR</div> <div></div>	MISSED APPROACH: Climb to 2200 direct SEYOG and hold.
<div><div><div><div></div><div></div></div><div></div></div></div> <div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat E visibility to 1 SM.</div>					
ATIS 119.025	HOUSTON CENTER 135.05 353.6	VICTORIA TOWER ★ 126.075 (CTAF) 0 257.95	GND CON 120.525 239.25	UNICOM 122.7	



7 NM Holding Pattern		CUDKO		HEMKU		HUSAM 1.6 NM to RW13		2200 ↑	SEYOG ✦
6000 2200		← 308° → 128°		128°		1700		0.9 NM to RW13	
GP 3.00° TCH 53				6.7 NM		3.2 NM		0.7	
						0.9 NM		RW13	
CATEGORY	A	B	C	D	E				
LPV DA	315-½ 200 (200-½)								
LNAV/ VNAV DA	365-½ 250 (300-½)								
LNAV MDA	440-½ 325 (400-½)								
CIRCLING	580-1	465 (500-1)	820-2 705 (800-2)	880-2 ½ 765 (800-2 ½)	NA				

