

WAAS CH 97317 W10A	APP CRS 099°	Rwy Ldg TDZE 16 Apt Elev 20	8151
--	------------------------	---	-------------

RNAV (GPS) Y RWY 10L

PALM BEACH INTL (PBI)

RNP APCH - GPS.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cnts visibility to RVR 5500 and increase LNAV Cnts C/D visibility to RVR 6000.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

AS

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct MORGA and hold.

D-ATIS 123.75	PALM BEACH APP CON 128.3 317.4	PALM BEACH TOWER 119.1 257.8	GND CON 121.9 284.6	CLNC DEL 121.6 284.6	CPDLC
-------------------------	--	--	-------------------------------	--------------------------------	-------

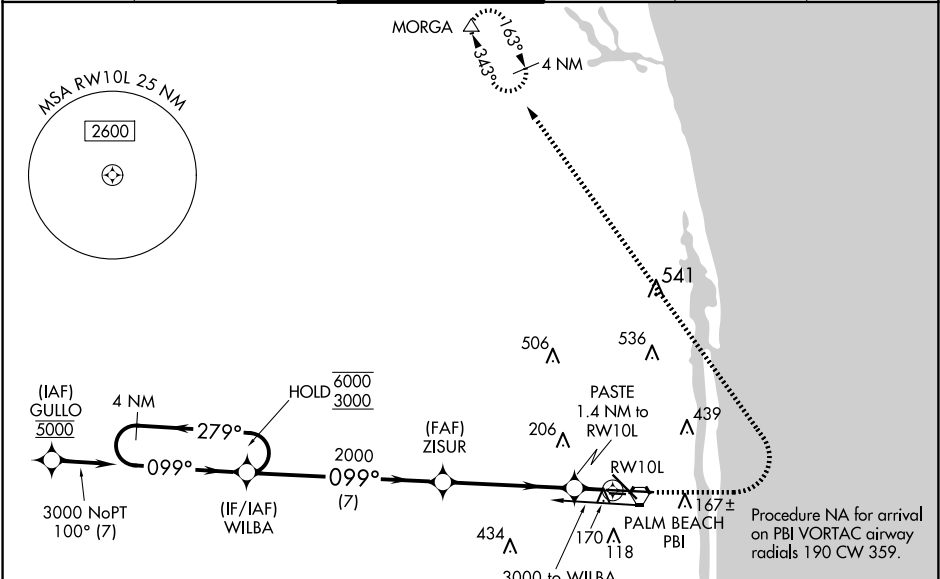

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).

4 NM Holding Pattern

WILBA

6000 ← 279°

3000 → 099°

GP 3.00° TCH 52

2000

500

7 NM

4.7 NM

1.4 NM

1000

3000

MORGA

△

1000

3000

MORGA

△

1000

3000

MORGA

△

CATEGORY	A	B	C	D
LPV DA #	216/24	200 (200-½)		
LNAV/VNAV DA	392/35	376 (400-¾)		
LNAV MDA	420/24	404 (400-½)	420/40	404 (400-¾)
CIRCLING	560-1	540 (600-1)	740-2 720 (800-2)	780-2½ 760 (800-2½)

HIRL Rwy 10L-28R

REIL Rwys 10R, 14, 28L, 28R and 32

MIRL Rwys 14-32 and 10R-28L