TBIRD SIX DEPARTURE (RNAV) Transition Routes

PALM BEACH DEP CON
128.3 317.4
D-ATIS
123.75
CLNC DEL
121.6 284.6
CPDLC
GND CON
121.9 284.6
PALM BEACH TOWER
119.1 257.8

RNAV 1 - DME/DME/IRU or GPS.
RADAR required for non-GPS equipped aircraft.

TOP ALTITUDE: 11000

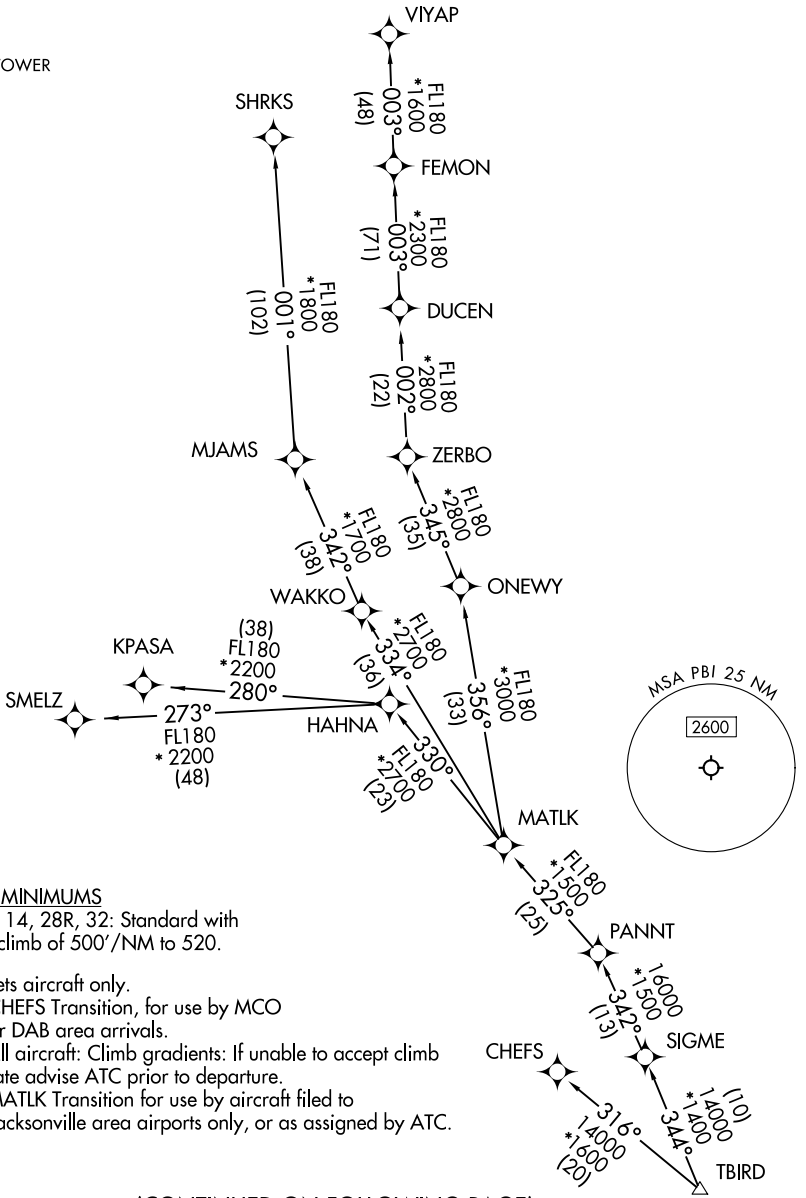

TAKEOFF MINIMUMS
Rwys 10L, 14, 28R, 32: Standard with minimum climb of 500'/NM to 520.

NOTE: Jets aircraft only.
NOTE: CHEFS Transition, for use by MCO or DAB area arrivals.
NOTE: All aircraft: Climb gradients: If unable to accept climb rate advise ATC prior to departure.
NOTE: MATLK Transition for use by aircraft filed to Jacksonville area airports only, or as assigned by ATC.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-3, 07 AUG 2025 to 04 SEP 2025
SE-3, 07 AUG 2025 to 04 SEP 2025