PERU, INDIANA

TACAN or VOR RWY 5

TACAN	APCH CRS	Rwy ldg	12,501
Chan 21(Y)	052°	TDZE	811
		Arpt Elev	811

[USAF] GRISSOM ARB (KGUS)

RADAR, DME required

* When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile; CAT CDE vis to 1⅜ miles.

ALSF-1

MISSED APPROACH: Climb to 3000 on the GUS TACAN R-041 to RICHI and hold. Missed approach requires use of RNAV or ATC RADAR monitoring.

ATIS	APP CON	TOWER ★	GND CON	CLNC DEL
132.55 270.8	121.05 351.8 (E) 123.85 291.675 (W)	133.7 290.45	128.425 275.8	128.425 275.8

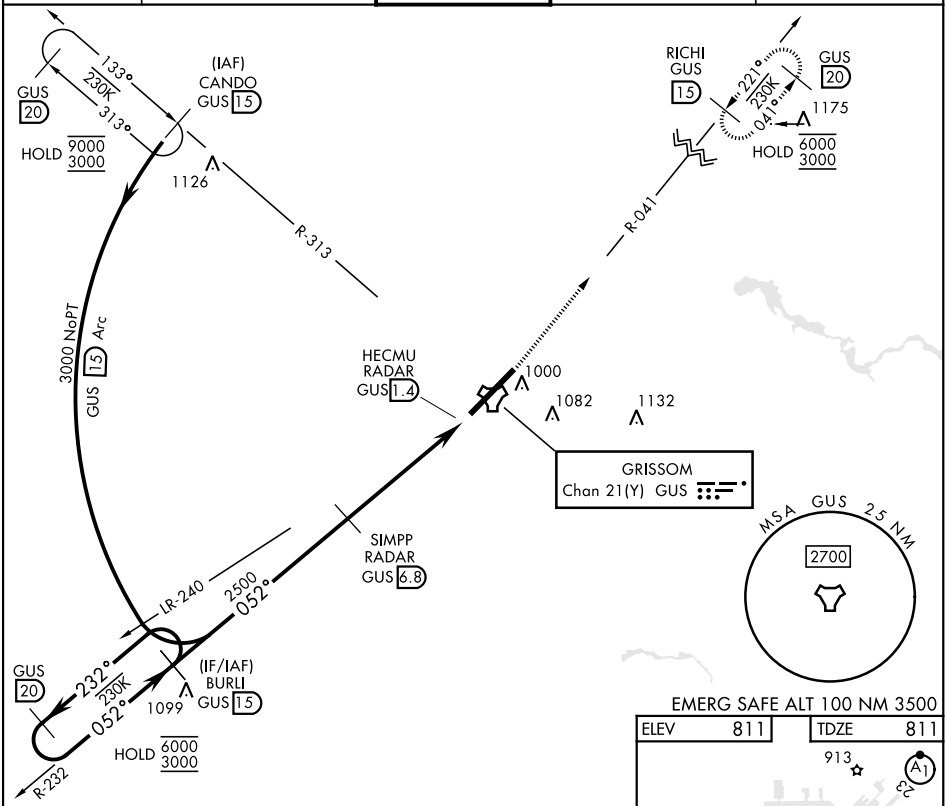

EMERG SAFE ALT 100 NM 3500

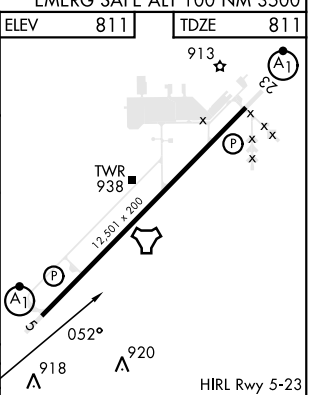

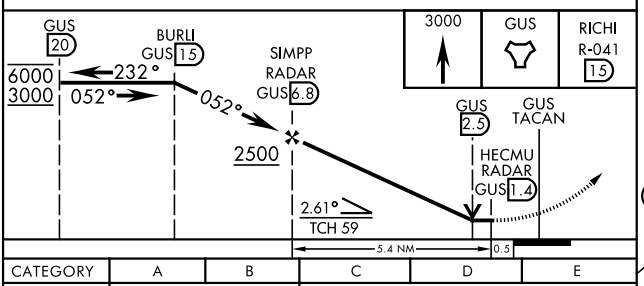

CATEGORY	A	B	C	D	E
S-5 *	1280/24 469 (500-½)		1280/50 469 (500-1)		
C CIRCLING	1340-1 529 (600-1)		1400-1½ 589 (600-1½)	1400-2 589 (600-2)	1440-2¼ 629 (700-2¼)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-2, 07 AUG 2025 to 04 SEP 2025
EC-2, 07 AUG 2025 to 04 SEP 2025