WAAS CH 70714 W23A	APP CRS 233°	Rwy Ldg 5590 TDZE 5505 Apt Elev 5507

RNAV (GPS) RWY 23

FOUR CORNERS RGNL (FMN)

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5998 feet and all visibilities 5/8 SM. Increase LNAV/VNAV DA to 6274 feet and all visibilites 1 SM. Increase all MDAs 260 feet and LNAV visibilities Cat B 1/4 SM, C/D 7/8 SM and Circling visibility Cat A/B 1/4 SM and Cat C 1/2 SM.

MISSED APPROACH: Climb to 8000 direct EXZAR and on track 265° to HASIT and hold.

ATIS	DENVER CENTER	FARMINGTON TOWER★	GND CON	UNICOM
127.15	118.575 348.7	118.9 (CTAF) L 257.8	121.7	122.95

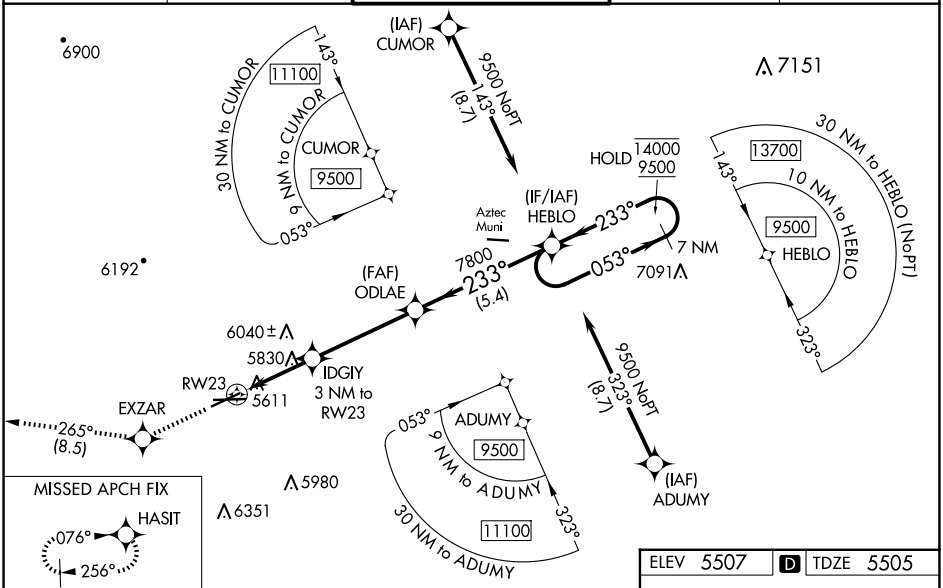

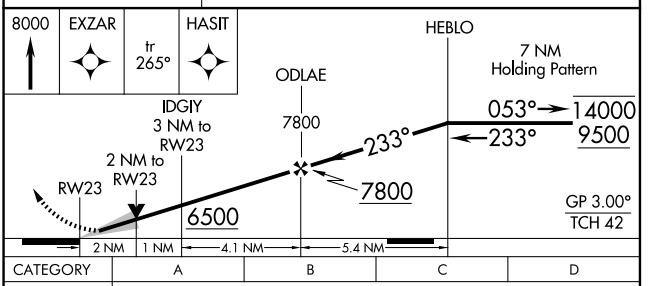

CATEGORY	A	B	C	D
LPV DA	5755-¾ 250 (300-¾)			
LNAV/VNAV DA	6031-1½ 526 (600-1½)			
LNAV MDA	6080-1 575 (600-1)		6080-1⅝ 575 (600-1⅝)	
C CIRCLING	6100-1 593 (600-1)	6140-1 633 (700-1)	6380-2½ 873 (900-2½)	6400-3 893 (900-3)

ELEV 5507 D TDZE 5505



REIL Rwys 23 and 25 L
MIRL Rwys 5-23 and 7-25 L

SW-1, 07 AUG 2025 to 04 SEP 2025
SW-1, 07 AUG 2025 to 04 SEP 2025