CLOVIS, NEW MEXICO

RNAV (GPS) RWY 13

APCH CRS	Rwy ldg	TDZE	Arpt Elev
128°	8194	4294	4295

(USAF)

CANNON AFB (KCVS)

RNP APCH

SSALR (A3)

MISSED APPROACH: Climb to 7000 direct HOMEP, then track 128° to SOPLE and hold.

* When ALS inop increase vis to 1 3/8 miles.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1 1/2 miles.

ATIS	CANNON APP CON	TOWER	GND CON	CLNC DEL
119.1 269.9	118.425 352.1	120.4 270.25	121.9 275.8	120.2 293.225

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C.

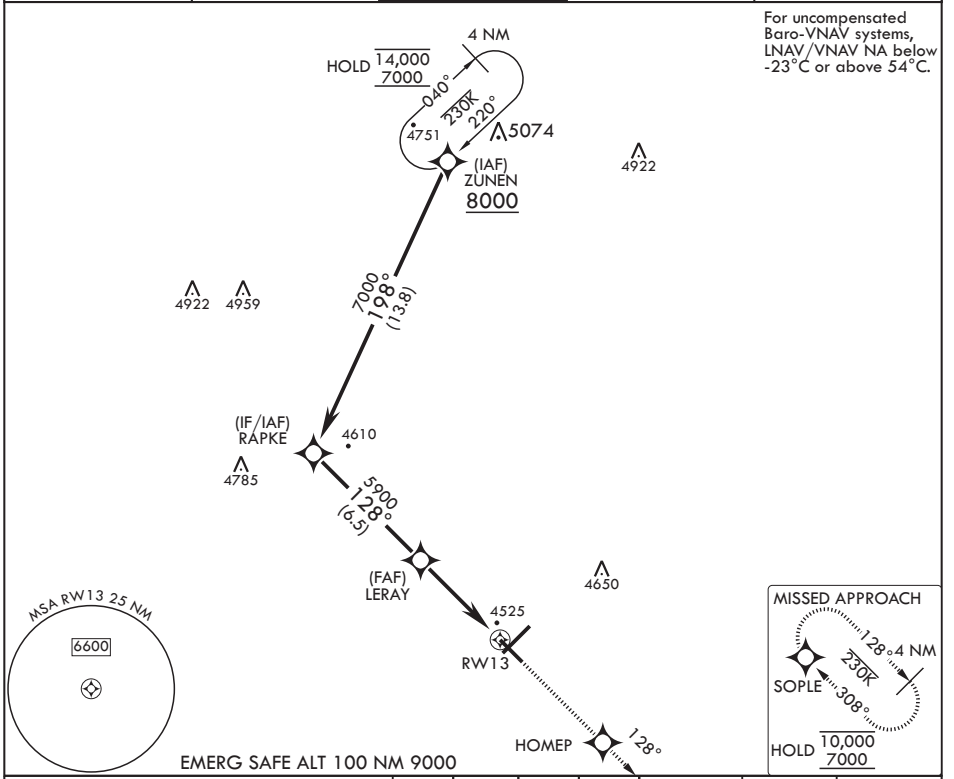

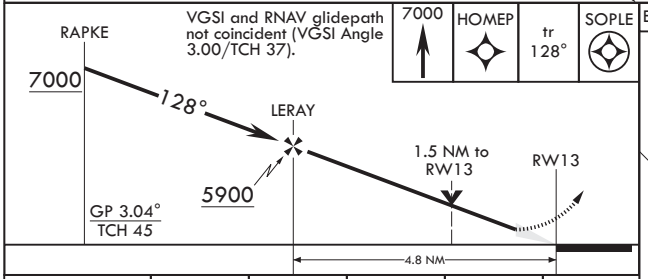

ELEV 4295 TDZE 4294

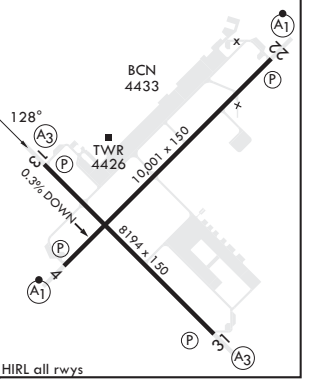

CATEGORY	A	B	C	D	E
LNAV/VNAV DA*	4766-1		472	(500-1)	
LNAV MDA**	4820-½	526 (600-½)	4820-1	526	(600-1)
CIRCLING	4840-1	545 (600-1)	4860-1½ 565 (600-1½)	5000-2¼ 705 (800-2¼)	5020-2½ 725 (800-2½)

CLOVIS, NEW MEXICO

Amdt 4 07OCT21

34°23'N - 103°19'W

CANNON AFB (KCVS)

RNAV (GPS) RWY 13

SW-1, 07 AUG 2025 to 04 SEP 2025