

WAAS
CH **90126**
W10A

APP CRS
101°

Rwy Ldg
TDZE
1141
Apt Elev
1203

RNAV (GPS) Y RWY 10C
PITTSBURGH INTL (PIT')


RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Use of FD or AP required during simultaneous operations.

MISSED APPROACH:

Climb to 4000 direct GUBLE and right turn on track 174° to GUZIT and hold.

D-ATIS ARR 127.25 DEP 135.9	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6	CLNC DEL 126.75 353.7
---	---	--	---	---------------------------------

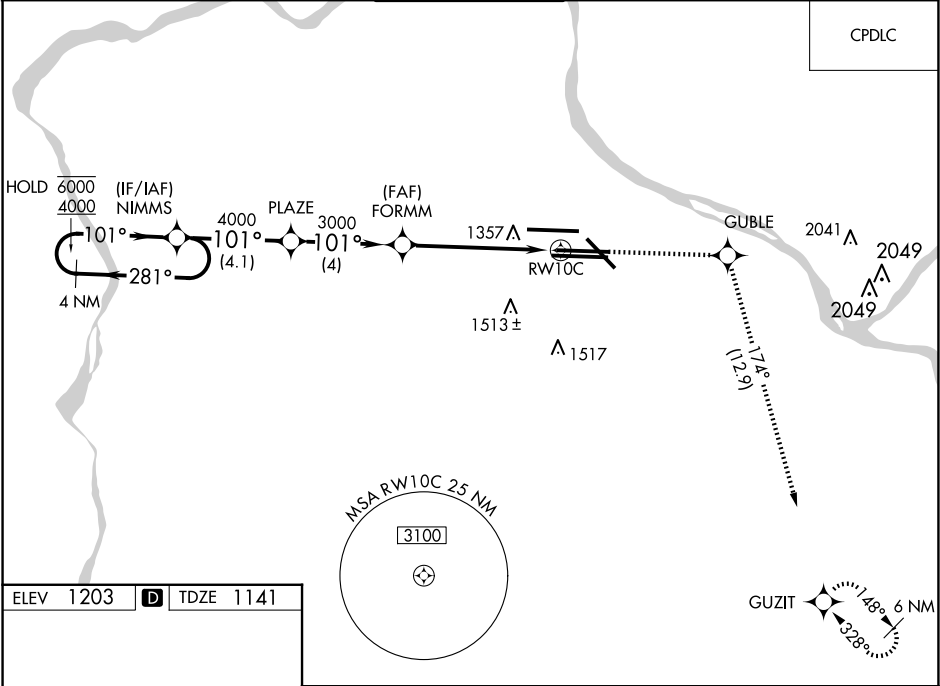

ELEV 1203

D

TDZE 1141

REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R,
28C, and 32

4 NM Holding Pattern

NIMMS

PLAZE

FORMM

1.5 NM to RWY10C

RWY10C

6000

4000

3000

3000

GP 3.00°

TCH 50

4.1 NM

4 NM

4.2 NM

1.5

CATEGORY	A	B	C	D
LPV DA		1438/45	297 (300-¾)	
LNAV/VNAV DA		1634-1⅓	493 (500-1⅓)	
LNAV MDA	1680/55	539 (500-1)	1680-1½	539 (500-1½)
C CIRCLING	1700-1	497 (500-1)	1880-2 677 (700-2)	1880-2¼ 677 (700-2¼)