

LOC/DME I-ONW <b>111.7</b> Chan <b>54</b>	APP CRS <b>196°</b>	Rwy Ldg <b>6948</b> TDZE <b>-1</b> Apt Elev <b>4</b>
---	------------------------	--

## LOC RWY 20


LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

**T** Rwy 20 helicopter visibility reduction below RVR 4000 NA.  
**A** For inop ALS when using SHORE fix minimums, increase S-20 Cat D visibility to RVR 5500. For inop ALS, increase S-20 Cat D visibility to 2 SM.

MALS  
 

**MISSED APPROACH:** Climb to 1300 then climbing left turn to 2000 on heading 180° and RQR VOR/DME R-123 to SAFES INT/RQR 28 DME and hold.

D-ATIS	NEW ORLEANS APP CON	NEW ORLEANS TOWER	GND CON	CLNC DEL	CPDLC
127.55	WEST 125.5 350.35	119.5 254.3	121.9 273.525	120.925	
	EAST 133.15 290.3				

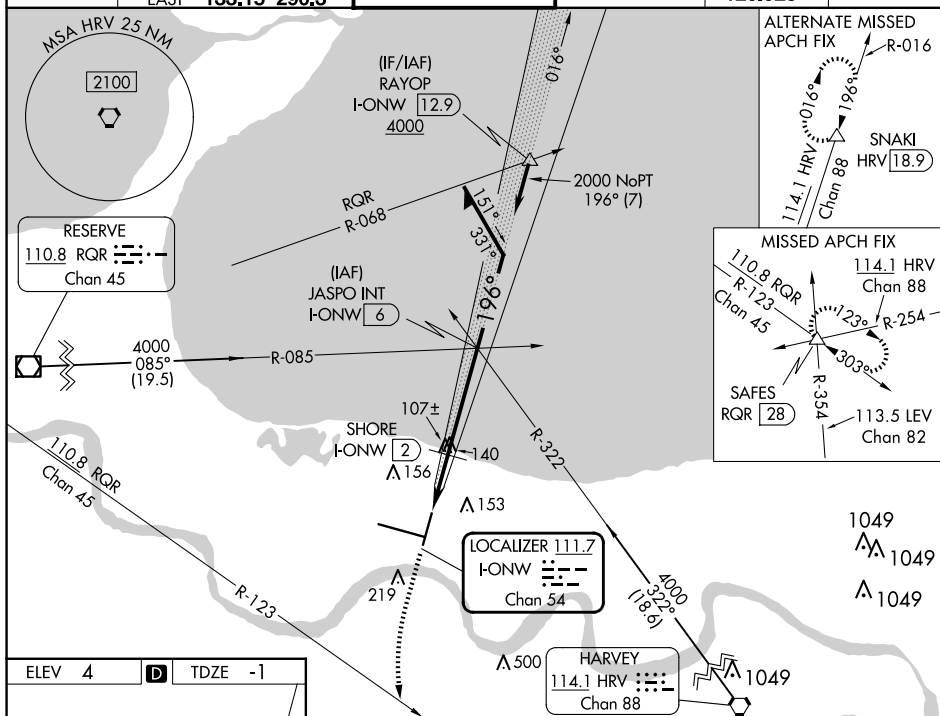

ELEV 4 TDZE -1

196°

10104

150

7002

150

29

TWR 2

RLLS Rwy 2  
TDZ/CL Rwy 11  
HIRL All Rwy's

FAF to MAP 6.1 NM					
Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

[illegible]