


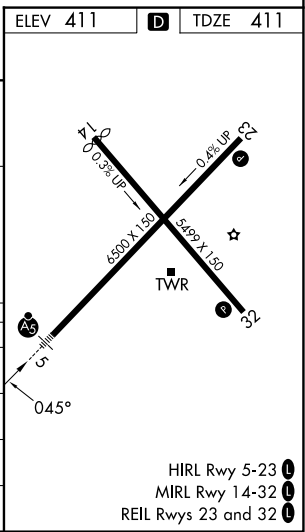
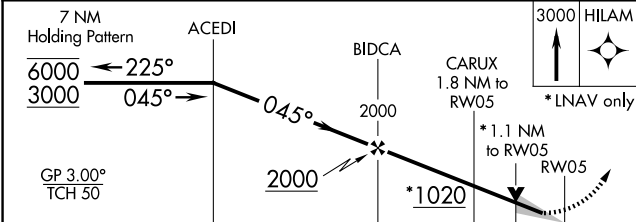
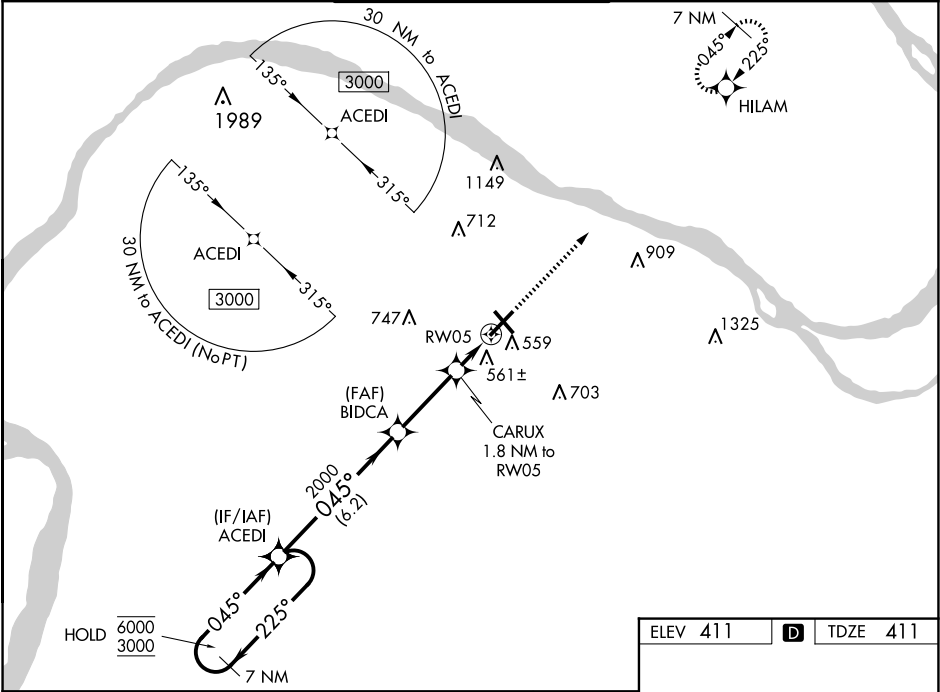
WAAS CH <b>93701</b> <b>W05A</b>	APP CRS <b>045°</b>	Rwy Ldg TDZE <b>411</b> Apt Elev <b>411</b>
----------------------------------------	------------------------	---------------------------------------------------

RNAV (GPS) RWY 5

BARKLEY RGNL (PAH)

RNP APCH.	MALSRL 	MISSED APPROACH: Climb to 3000 direct HILAM and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. ▲ For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.		

ASOS <b>118.375</b>	MEMPHIS CENTER <b>133.65 292.15</b>	PADUCAH TOWER★ <b>119.6 (CTAF) 306.9</b>	GND CON <b>121.7 306.9</b>	UNICOM <b>122.95</b>
------------------------	----------------------------------------	---------------------------------------------	-------------------------------	-------------------------



CATEGORY	A	B	C	D
LPV DA	611-½ 200 (200-½)			
LNAV/DA VNAV	837-¾ 426 (500-¾)			
LNAV MDA	820-½ 409 (500-½)		820-¾ 409 (500-¾)	
CIRCLING	900-1 489 (500-1)		920-1½ 1100-2¼ 509 (600-1½) 689 (700-2¼)	

SE-1, 07 AUG 2025 to 04 SEP 2025

SE-1, 07 AUG 2025 to 04 SEP 2025