


VORTAC SBY 111.2 Chan 49	APP CRS SBY 24.1 Arc	Rwy Idg 8005 TDZE 38 Apt Elev 40
--	--------------------------------	---

VOR/DME or TACAN RWY 10
Wallops Flight Facility (WAL)

T
A When local altimeter setting not received, use Salisbury altimeter setting and increase all MDA 60 feet and Circling Cats C/D visibility $\frac{1}{4}$ mile. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH: Climbing left turn to 2000 on heading 240° and SBY VORTAC 24.1 DME
Arc clockwise to MAGGO/SBY 24.1 DME
and hold

ASOS 119.175	PATUXENT APP CON ★ 127.95 314.0	WALLOPS TOWER ★ 126.5 (CTAF) 0 306.975 (CTAF) 0	GND CON 127.875 269.325	CLNC DEL 121.7
------------------------	---	---	-----------------------------------	--------------------------

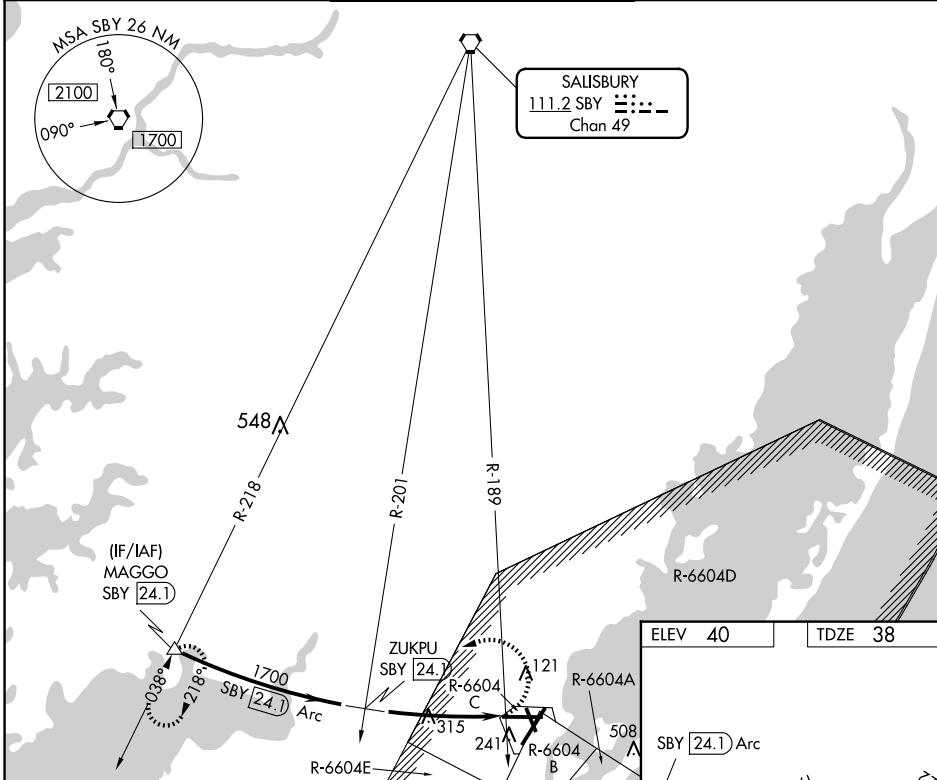

Segment	Altitude	Speed	Climb Rate
1	2000 to 1700	24.1	CW
2	1700 to R-189	24.1	CW
3	R-189 to MAGGO	24.1	CW

CATEGORY	A	B	C	D
S-10	900-1¼	862 (900-1¼)	900-2½	862 (900-2½)
C CIRCLING	900-1¼	860 (900-1¼)	900-2½ 860 (900-2½)	900-2¾ 860 (900-2¾)