RNAV (GPS) RWY 17

OLYMPIA RGNL (OLM)

WAAS	APP CRS		
CH **45599**	**176°**	Rwy Idg	**5500**
W17A		TDZE	**207**
		Apt Elev	**208**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS; increase LNAV/VNAV visibility all Cats to 1⅛ SM. Increase LNAV Cats C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 4000 direct CORER and on track 181° to CETRA and hold, continue climb-in-hold to 4000.

ATIS	SEATTLE APP CON	OLYMPIA TOWER*	GND CON	UNICOM
135.725	**121.1 290.9**	**124.4** (CTAF) **254.25**	**121.6**	**122.95**

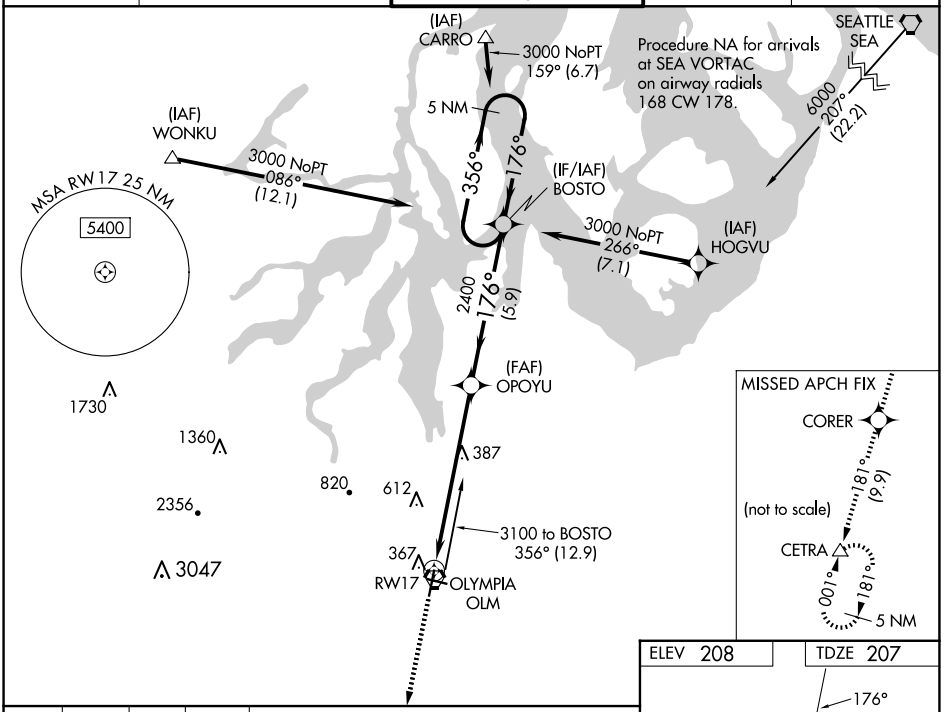

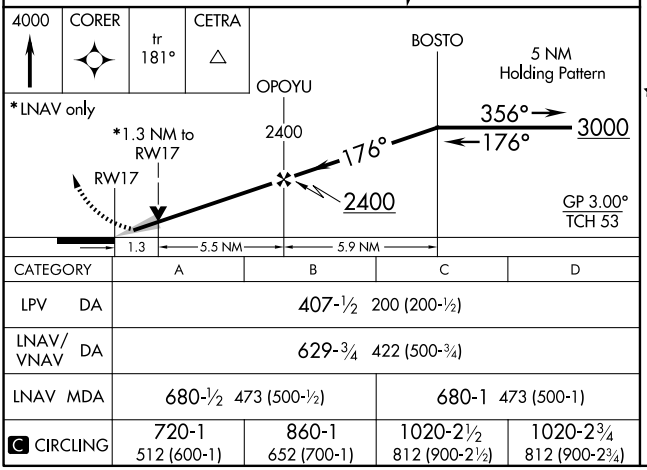

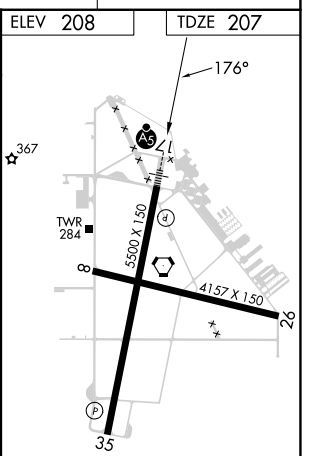

CATEGORY	A	B	C	D
LPV DA	407-½ 200 (200-½)			
LNAV/VNAV DA	629-¾ 422 (500-¾)			
LNAV MDA	680-½ 473 (500-½)		680-1 473 (500-1)	
C CIRCLING	720-1 512 (600-1)	860-1 652 (700-1)	1020-2½ 812 (900-2½)	1020-2¾ 812 (900-2¾)

NW-1, 07 AUG 2025 to 04 SEP 2025
NW-1, 07 AUG 2025 to 04 SEP 2025