

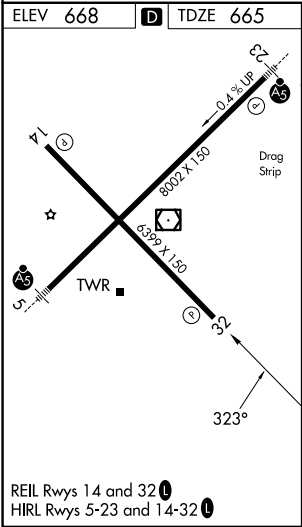
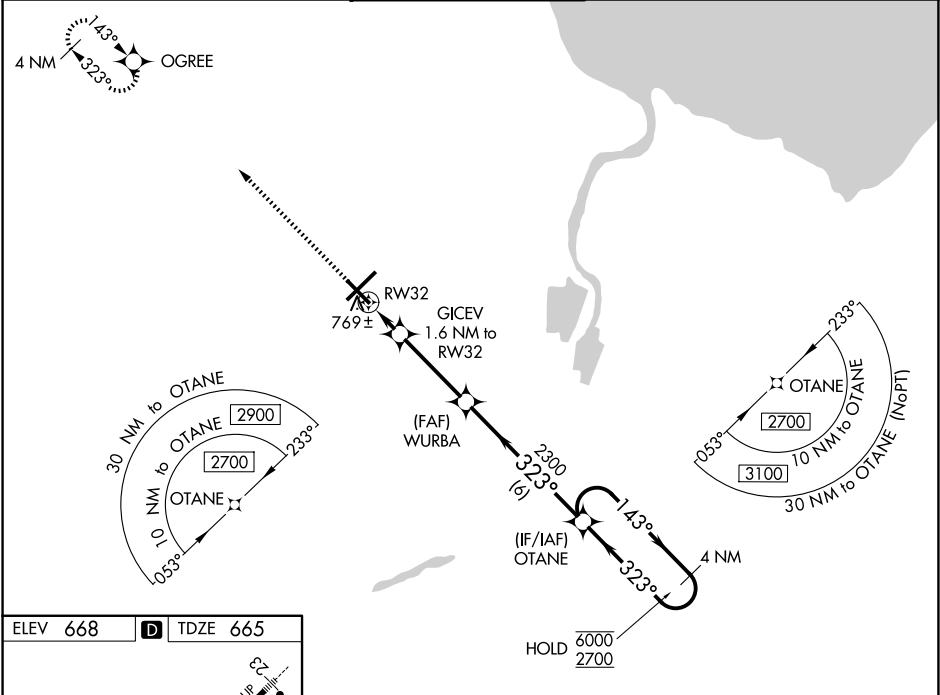
|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>78011</b><br><b>W32A</b> | APP CRS<br><b>323°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>6399</b><br><b>665</b><br><b>668</b> |
|--|------------------------|-----------------------------|---|



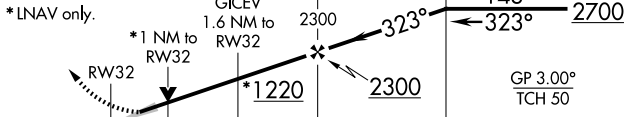
RNAV (GPS) RWY 32

MBS INTL (MBS)

|  |  |
|--|--|
| RNP APCH.  | MISSED APPROACH: Climb to 2300 direct OGRE and hold. |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. |  |

|                        |  |   |                         |                           |                         |
|------------------------|--|---|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>125.925</b> | GREAT LAKES APP CON ★<br><b>126.45 235.625</b> | SAGINAW TOWER ★<br><b>120.1(CTAF) 257.7</b> | GND CON<br><b>121.7</b> | CLNC DEL<br><b>121.85</b> | UNICOM<br><b>122.95</b> |
|------------------------|--|---|-------------------------|---------------------------|-------------------------|



|   |   |                       |                         |                       |   |
|---|---|-----------------------|-------------------------|-----------------------|---|
| 2300  | OGREE   | 4 NM Holding Pattern  |                         |                       |   |
|  |  |                       |                         |                       |   |
| *LNAV only.   |   |                       |                         |                       |   |
|  |   |                       |                         |                       |   |
| CATEGORY  |   | A                     | B                       | C                     | D |
| LPV DA  | 865-¾ 200 (200-¾)   |                       |                         |                       |   |
| LNAV/VNAV DA  | 950-⅞ 285 (300-⅞)   |                       |                         |                       |   |
| LNAV MDA  | 1020-1 355 (400-1)  |                       |                         |                       |   |
| CIRCLING  | 1080-1<br>412 (500-1)   | 1120-1<br>452 (500-1) | 1240-1½<br>572 (600-1½) | 1240-2<br>572 (600-2) |   |