

| | | |
|--|------------------------|---|
| WAAS CH 65609 W14A | APP CRS 146° | Rwy Idg TDZE 2586 Apt Elev 2596 |
|--|------------------------|---|

RNAV (GPS) RWY 14

DODGE CITY RGNL (DDC)


⚠

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1¾ SM.



MALSR

MISSED APPROACH: Climb to 4600 direct CORKU and hold.

| | | |
|------------------------|--|---------------------------------|
| ASOS 118.525 | KANSAS CITY CENTER 125.2 285.425 | UNICOM 122.7 (CTAF) 0 |
|------------------------|--|---------------------------------|

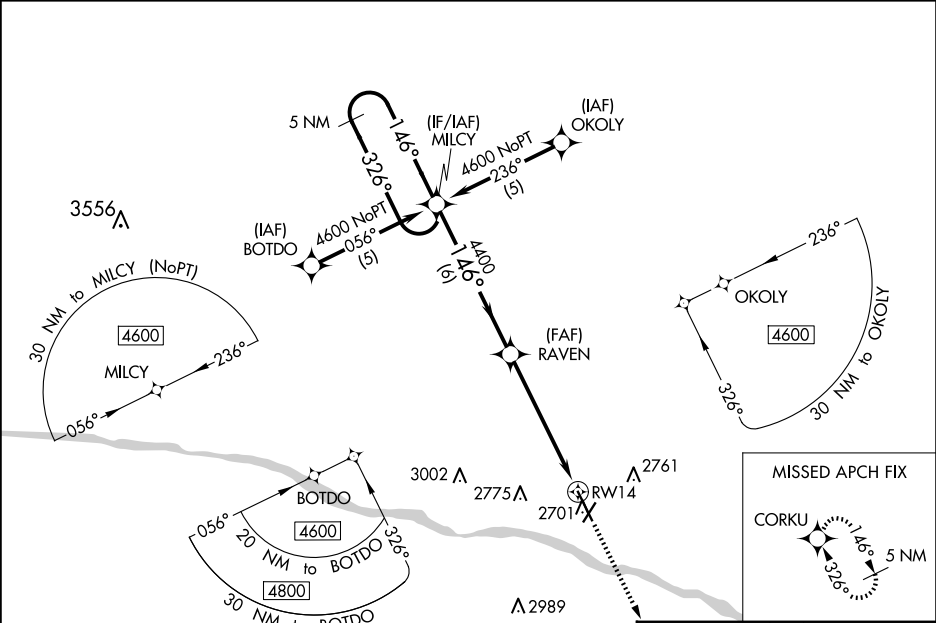

| | |
|------------------|---------------------------|
| ELEV 2596 | D TDZE 2586 |
|------------------|---------------------------|

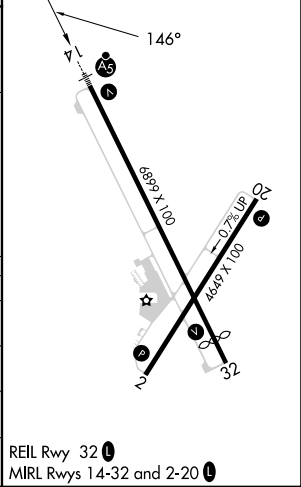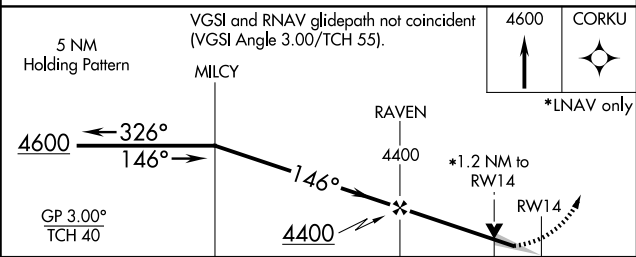

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-----------------------|-------------------------|
| LPV DA | | 2836-½ | 250 (300-½) | |
| LNAV/VNAV DA | | 2991-1 | 405 (400-1) | |
| LNAV MDA | 3020-½ | 434 (500-½) | 3020-¾ | 434 (500-¾) |
| CIRCLING | 3040-1 444 (500-1) | 3080-1 484 (500-1) | 3320-2 724 (800-2) | 3320-2¼ 724 (800-2¼) |