

| | | | |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-APN 109.7 | APP CRS 007° | Rwy Idg TDZE Apt Elev | 9001 685 690 |
|---------------------------|------------------------|-----------------------------|---|

ILS or LOC RWY 1
ALPENA COUNTY RGNL (APN)

ADF required.




For inop ALS, increase S-LOC 1 Cat C/D visibility to 1 5/8 SM.



MISSED APPROACH: Climb to 1100 then climbing left turn to 2800 direct AP LOM and hold.

| | | | | |
|-------------------------------|--|--|-------------------------------|-------------------------|
| ATIS 120.675 327.05 | ALPENA APP CON ★ 128.425 379.3 | ALPENA TOWER ★ 121.35 (CTAF) 0 318.1 | GND CON 121.9 275.8 | UNICOM 122.95 |
|-------------------------------|--|--|-------------------------------|-------------------------|


ALTERNATE MISSED APCH FIX



ALPENA
APN  116.5
Chan 112

LOCALIZER 109.7
I-APN ::=-.

A 1409

ALPENA
116.5 APN -
Chan 112

— LOM/IAF —
FELPS
206 AP : = — .
APN 7.3

(IF)
YARLU
APN 13.

2800 to YARLU
090° (3.9) and
007° (2.7)
(IAF)
AILES
APN 17

1648
142°
322°

ELEV 690 D TDZE 685

HIRL Rwy 1-19 L
 MIRL Rwy 7-25 L
 REIL Rws 7, 19
 and 25 L

TWR 768

61


5028 X 100

9001 X 150

007°

FAF to MAP 6.3 NM

| | 60 | 90 | 120 | 150 | 180 |
|-------|------|------|------|------|------|
| Knots | 6:18 | 4:12 | 3:09 | 2:31 | 2:06 |

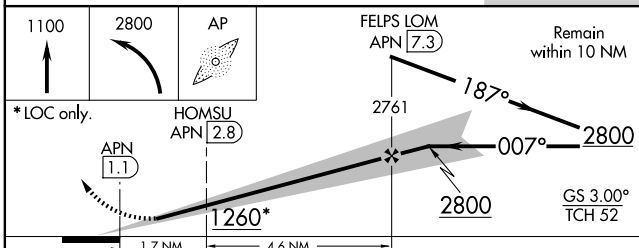

| CATEGORY | A | B | C | D |
|--------------------|--------------------|----------------------|---|---|
| S-ILS 1 | 885-½ 200 (200-½) | | | |
| S-LOC 1 | 1260-½ 575 (600-½) | 1260-1¼ 575 (600-1¼) | | |
| HOMSU FIX MINIMUMS | | | | |
| S-LOC 1 | 1140-½ 455 (500-½) | 1140-⅞ 455 (500-⅞) | | |