
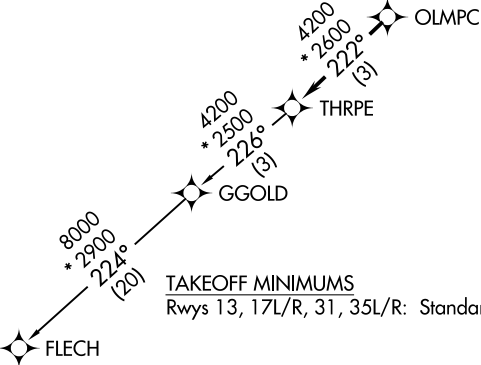


ATIS  
128.725  
GND CON  
121.7  
WILEY POST TOWER ★  
126.9 306.9  
OKE CITY DEP CON  
124.6 266.8

TOP ALTITUDE:  
ASSIGNED BY ATC

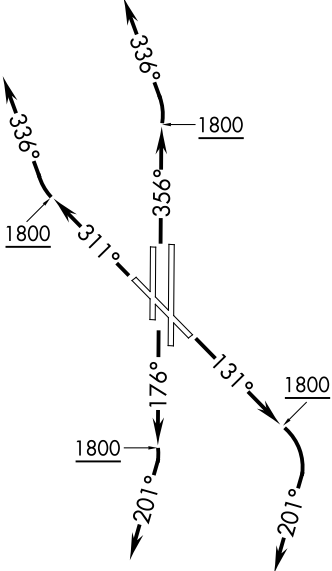

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.

TAKEOFF MINIMUMS  
Rwys 13, 17L/R, 31, 35L/R: Standard with minimum climb of 500' per NM to 2100.

NOTE: Chart not to scale.

**▼ DEPARTURE ROUTE DESCRIPTION**  
TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to OLMP, thence . . .  
TAKEOFF RWYS 17L/R: Climb heading 176° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to OLMP, thence . . .  
TAKEOFF RWY 31: Climb heading 311° to 1800, then right turn heading 336° or as assigned by ATC, expect RADAR vectors to OLMP, thence . . .  
TAKEOFF RWYS 35L/R: Climb heading 356° to 1800, then left turn heading 336° or as assigned by ATC, expect RADAR vectors to OLMP, thence . . .  
. . . . on track 222° to THRPE, then on (transition). Maintain 3000 or as assigned by ATC.  
Expect filed altitude 10 minutes after departure.  
FLECH TRANSITION (THRPE3.FLECH)  
GGOLD TRANSITION (THRPE3.GGOLD)