



LOC/DME I-RBD <b>110.75</b> Chan <b>44</b> (Y)	APP CRS <b>309°</b>	Rwy Idg TDZE <b>660</b> Apt Elev <b>661</b>
------------------------------------------------------	------------------------	---------------------------------------------------

ILS or LOC RWY 31

DALLAS EXEC (RBD)

RADAR required for procedure entry, DME or RADAR required for LOC only.	MISSED APPROACH: Climb to 1200 then climbing right turn to 2500 on heading 090° and CVE VOR/DME R-125 to FLIPP/CVE 38.5 DME and hold.
----------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------

ATIS <b>126.35</b>	LONE STAR APP CON <b>125.2 343.65</b>	EXECUTIVE TOWER★ <b>127.25</b> (CTAF) <b>0</b>	GND CON <b>119.475</b>	CLNC DEL <b>118.625</b>	UNICOM <b>122.95</b>
-----------------------	------------------------------------------	---------------------------------------------------	---------------------------	----------------------------	-------------------------

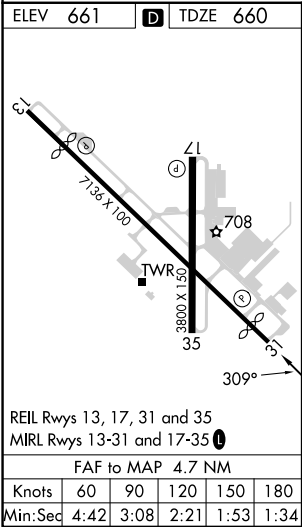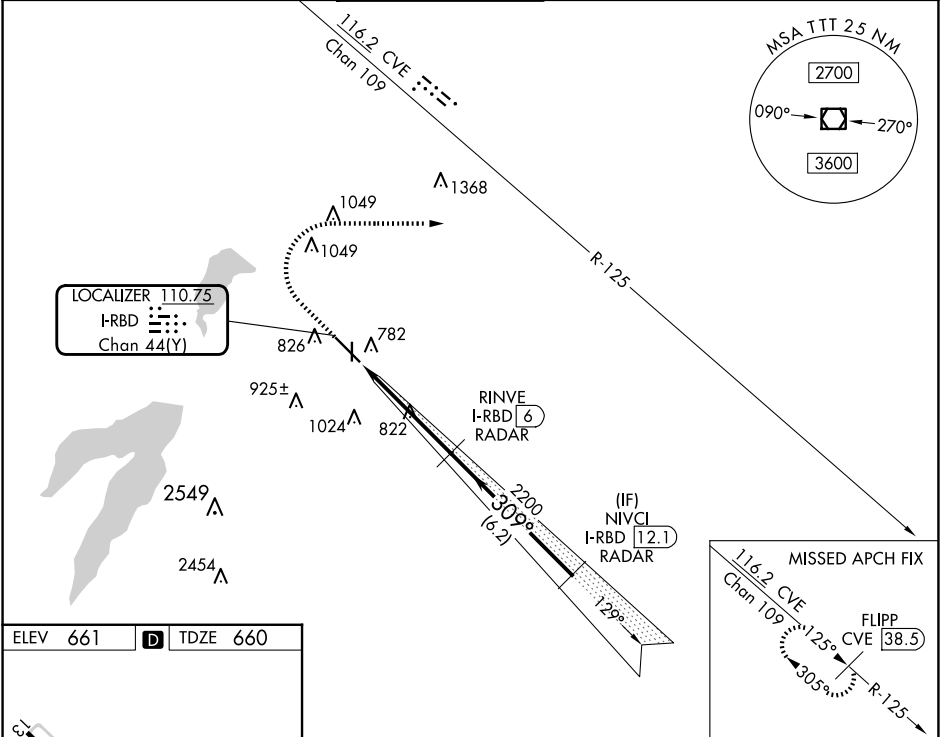

1200	2500	CVE R-125	FLIPP CVE [38.5]	RINVE I-RBD [6] RADAR	NIVCL I-RBD [12.1] RADAR
*LOC only.					
CATEGORY	A	B	C	D	
S-ILS 31	860-3/4 200 (200-3/4)				
S-LOC 31	1080-1 420 (500-1)		1080-1 1/8 420 (500-1 1/8)		
CIRCLING	1160-1 499 (500-1)	1220-1 559 (600-1)	1340-2 679 (700-2)	1400-2 1/4 739 (800-2 1/4)	