RNAV (GPS) RWY 34

WORLAND MUNI (WRL)

APP CRS		
342°	Rwy Idg	7000
	TDZE	4252
	Apt Elev	4252

When local altimeter setting not received, use Greybull altimeter setting: increase all MDAs 140 feet; and LNAV all Cats, and Circling Cat C/D visibilities ½ SM. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 8500 direct PEYIP and on track 290° to CRANY and hold.

ASOS	SALT LAKE CENTER	UNICOM
135.475	133.25 285.6	123.05 (CTAF) L

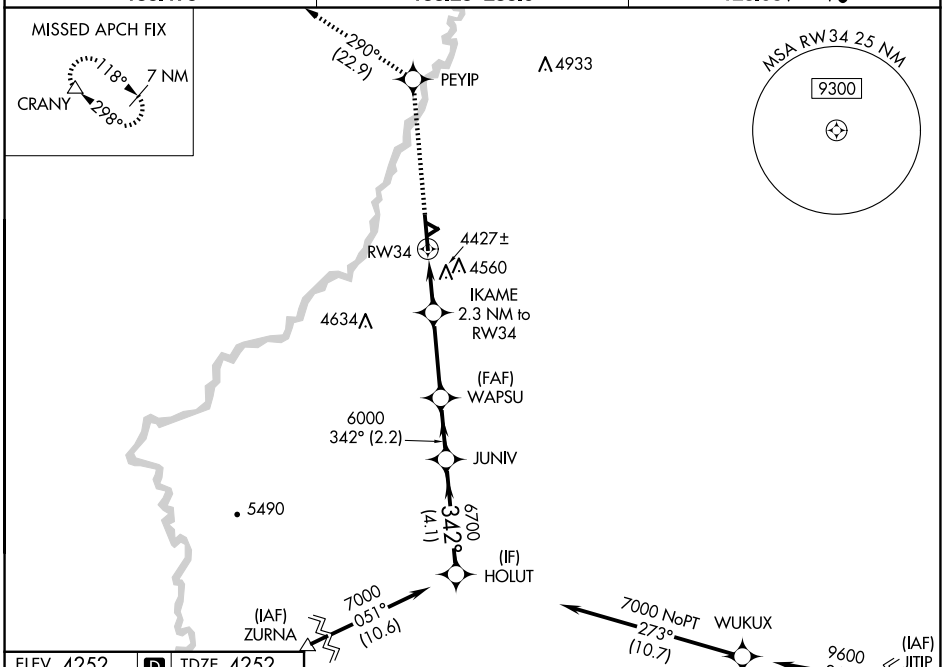

ELEV 4252 D TDZE 4252

REIL Rwys 16 and 34 L

MIRL Rwy 16-34 L

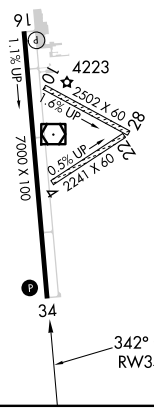

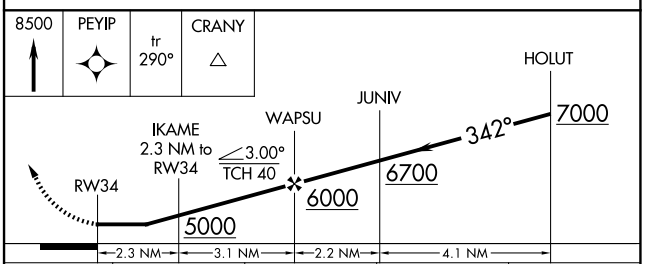

CATEGORY	A	B	C	D
LNAV MDA	4680-1	428 (500-1)	4680-1¼	428 (500-1¼)
CIRCLING	4920-1	668 (700-1)	4920-1¾ 668 (700-1¾)	5020-2½ 768 (800-2½)

NW-1, 07 AUG 2025 to 04 SEP 2025
NW-1, 07 AUG 2025 to 04 SEP 2025