

WAAS CH <b>77712</b> <b>W18A</b>	APP CRS <b>182°</b>	Rwy Idg <b>7150</b> TDZE <b>344</b> Apt Elev <b>346</b>
--	------------------------	---

RNAV (GPS) RWY 18

TUPELO RGNL (TUP)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ½ mile and Circling Cats C and D ½ mile. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MISSED APPROACH:  
Climb to 3000 direct GAGYE and hold.

ASOS <b>133.525</b>	MEMPHIS CENTER <b>128.5 279.55</b>	TUPELO TOWER ★ <b>118.775 (CTAF) 0 254.275</b>	GND CON <b>121.825 254.275</b>
------------------------	---------------------------------------	---	-----------------------------------

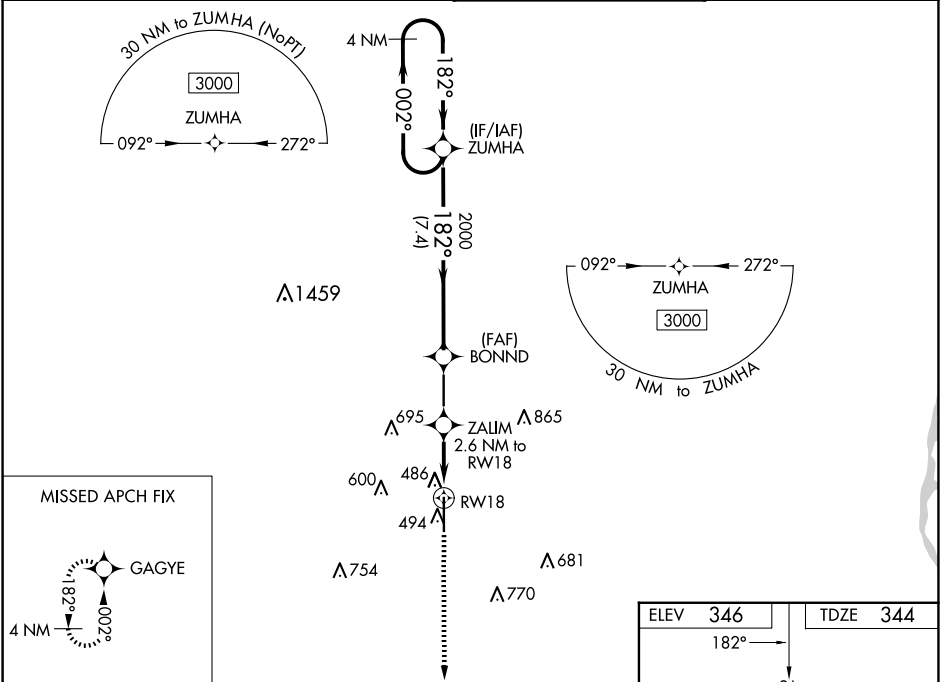

3000

GAGYE

\*LNAV only.

RW18

ZAIM 2.6 NM to RW18

BONND 2000

ZUMHA

1.1 NM

1.5 NM

2.5 NM

7.4 NM

182°

002°

3000

GP 3.00° TCH 45

CATEGORY	A	B	C	D
LPV DA	544-¾ 200 (200-¾)			
LNAV/VNAV DA	659-1 315 (400-1)			
LNAV MDA	740-1 396 (400-1)		740-1⅛ 396 (400-1⅛)	
CIRCLING	820-1 474 (500-1)		900-1½ 554 (600-1½) 1140-2½ 794 (800-2½)	

