


| | | |
|--|------------------------|---|
| WAAS CH 69217 W04A | APP CRS 044° | Rwy Idg 7701 TDZE 889 Apt Elev 913 |
|--|------------------------|---|

RNAV (GPS) RWY 4
CHIPPEWA VALLEY RGNL (EAU)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ½ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct
IROKE and hold.

| | | | | |
|-----------------|-----------------------------------|---------------------------------------|--------------------|------------------|
| ATIS 126.025 | MINNEAPOLIS CENTER 125.3 335.6 | EAU CLAIRE TOWER★ 118.575 (CTAF) 0 | GND CON 120.925 | UNICOM 122.95 |
|-----------------|-----------------------------------|---------------------------------------|--------------------|------------------|

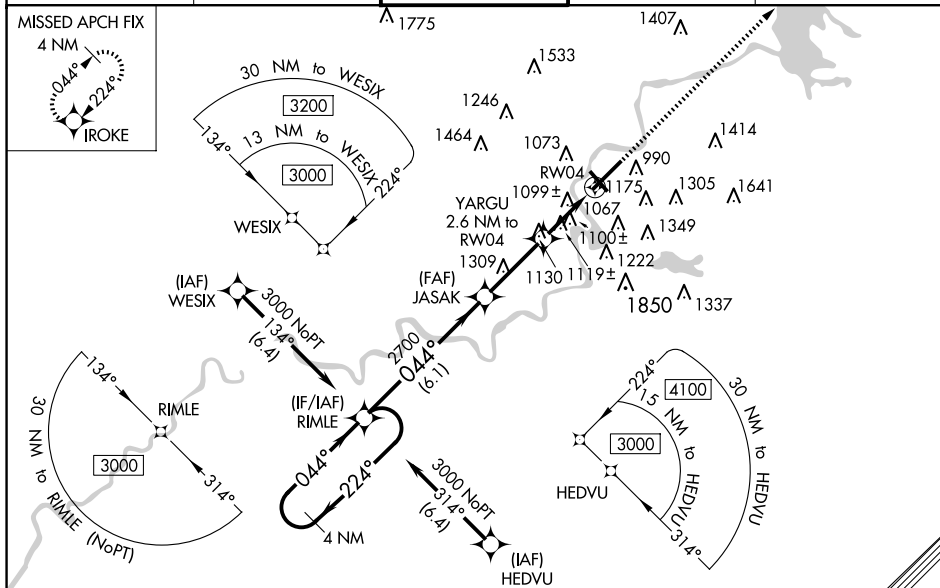

| | | |
|----------|----------|----------|
| ELEV 913 | D | TDZE 889 |
|----------|----------|----------|

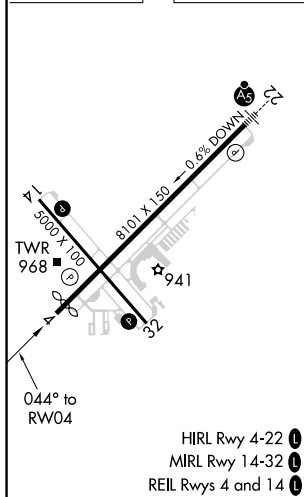

4 NM
Holding Pattern

RIMLE

JASAK
2700

YARGU
2.6 NM to RW04

*1.3 NM to RW04

RW04

*LNAV only

GP 3.00°
TCH 44

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------------|-------------------------|
| LPV DA | | 1089-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 1379-1 5/8 | 490 (500-1 5/8) | |
| LNAV MDA | 1360-1 | 471 (500-1) | 1360-1 3/8 | 471 (500-1 3/8) |
| C CIRCLING | 1480-1 567 (600-1) | 1540-1 627 (700-1) | 1660-2 1/4 747 (800-2 1/4) | 2200-3 1287 (1300-3) |