RNAV (GPS) RWY 4

SOUTHERN WISCONSIN RGNL (JVL)

WAAS	APP CRS	Rwy Idg	6701
CH 82617	043°	TDZE	806
W04A		Apt Elev	808

T A Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA with Rockford altimeter setting. When local altimeter setting not received, use Rockford altimeter setting and increase LPV DA to 1075 feet, LNAV/VNAV DA to 1314 feet and all MDAs 80 feet; increase LNAV Cat C and Circling Cats C/D visibility ¼ SM. For inop ALS, when using Rockford altimeter setting increase LPV all Cats visibility to ⅞ SM and LNAV/VNAV all Cats visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3100 direct OTLEE and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
128.25	121.0 327.0	118.8 (CTAF) L 225.4	121.65	121.65	122.95

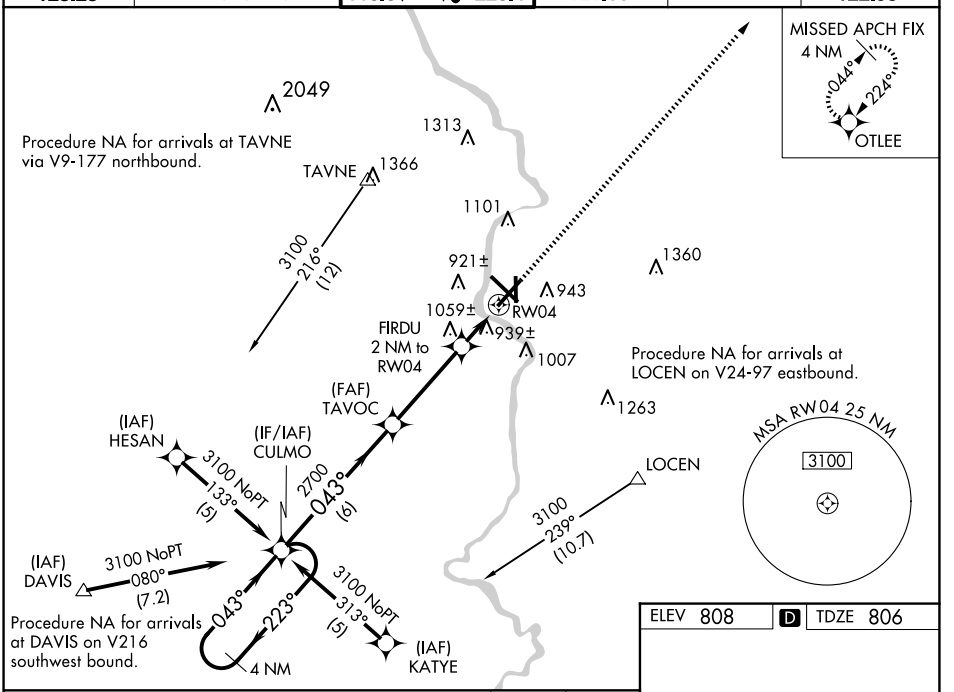

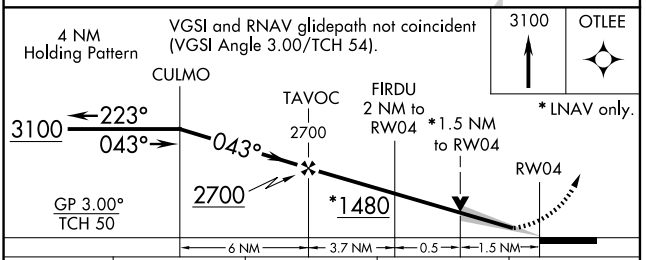

CATEGORY	A	B	C	D
LPV DA	1006-½ 200 (200-½)			
LNAV/VNAV DA	1245-1 439 (500-1)			
LNAV MDA	1320-½ 514 (600-½)		1320-1 514 (600-1)	1320-1¼ 514 (600-1¼)
CIRCLING	1320-1 512 (600-1)		1420-1¾ 612 (700-1¾)	1460-2 652 (700-2)



EC-3, 07 AUG 2025 to 04 SEP 2025
EC-3, 07 AUG 2025 to 04 SEP 2025