

VORTAC CVA	APP CRS	Rwy Ldg	4001
113.8	216°	TDZE	750
Chan 85		Apt Elev	751


VOR RWY 21
DAVENPORT MUNI (DVN)

▼ Rwy 21 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use MLL altimeter setting and increase all MDAs 60 feet and S-21 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

▲

MISSED APPROACH: Climbing right turn to 2400 direct CVA VORTAC and hold.

ASOS 120.175	QUAD CITY APP CON* 125.95 257.8	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------	---------------------------------

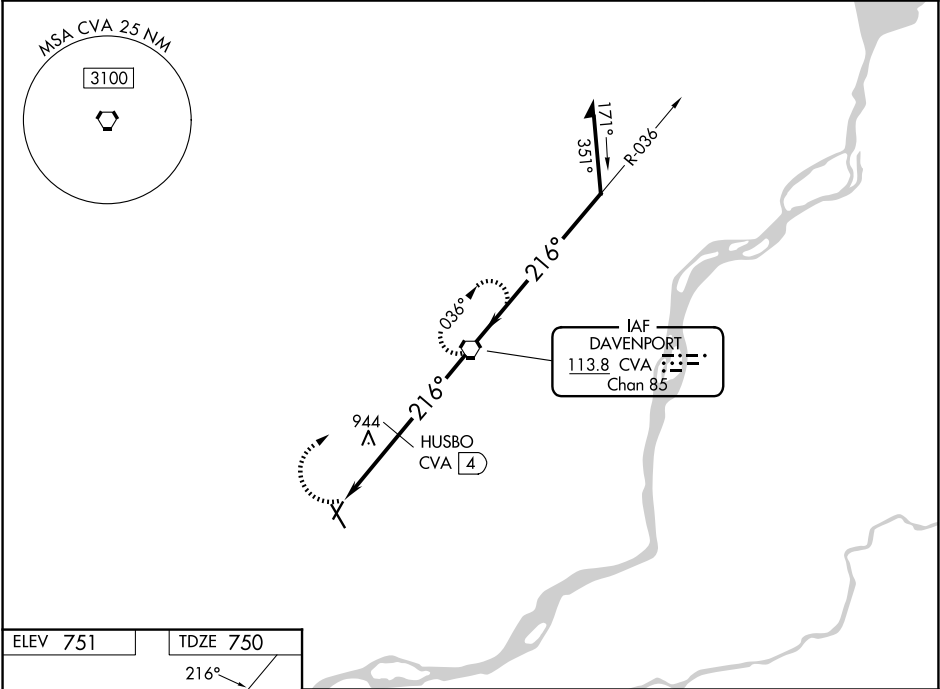

ELEV 751	TDZE 750
MIRL Rwy 3-21 1 HIRL Rwy 15-33 1 REIL Rws 3, 21, and 33 1	
FAF to MAP 7.1 NM	
Knots	60 90 120 150 180
Min:Sec	7:06 4:44 3:33 2:50 2:22

2400 CVA		CVA VORTAC 2700		Remain within 10 NM	
CVA 7.1		HUSBO CVA 4		2400	
1260*		2400		*1320 when using MLL altimeter setting.	
3.1 NM		4 NM			
CATEGORY	A	B	C	D	
S-21	1260-1	510 (600-1)	1260-1 3/8	510 (600-1 3/8)	
CIRCLING	1300-1	549 (600-1)	1300-1 1/2	549 (600-1 1/2)	1320-2
HUSBO FIX MINIMUMS (DME REQUIRED)					
S-21	1200-1	450 (500-1)	1200-1 3/8	450 (500-1 3/8)	
CIRCLING	1300-1	549 (600-1)	1300-1 1/2	549 (600-1 1/2)	1320-2