
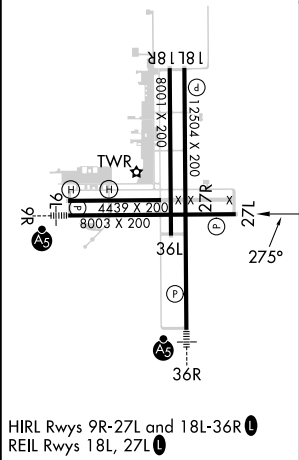


WAAS CH <b>97716</b> <b>W27A</b>	APP CRS <b>275°</b>	Rwy Idg TDZE Apt Elev	<b>8003</b> <b>72</b> <b>80</b>
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L

CECIL (VQQ)

RNP APCH.					MISSED APPROACH: Climb to 2000 direct ZORMI and hold.	
<div><div><div></div><div></div></div><div>Rwy 27L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.</div></div>						
ATIS 125.275	JACKSONVILLE APP CON 127.775 377.075	CECIL TOWER★ 126.1 (CTAF) 235.625	GND CON 121.625 226.675	CLNC DEL 123.975 254.25	GCO 135.075	

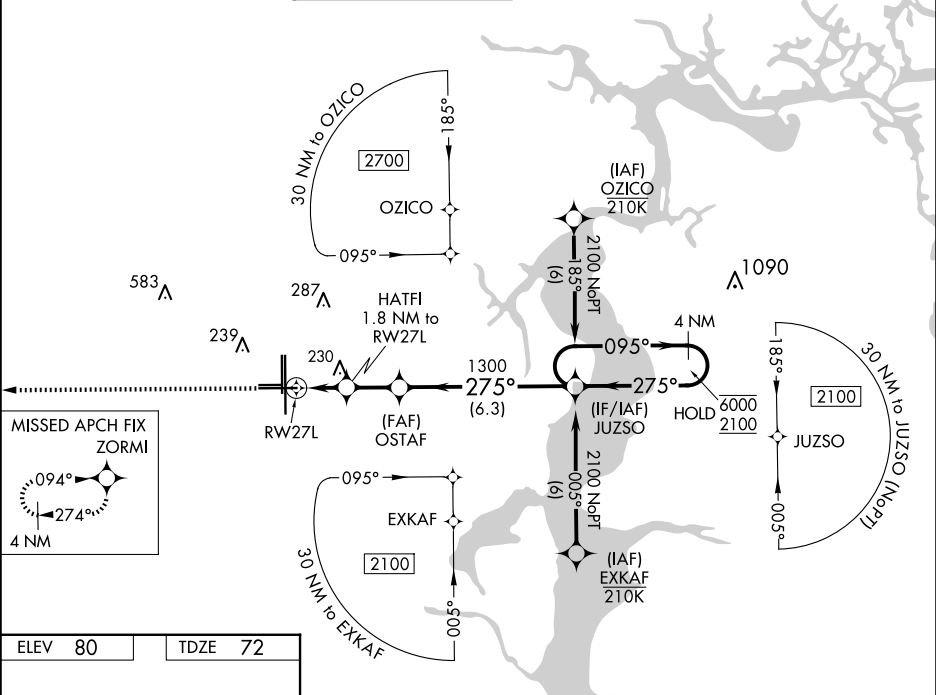

2000 ZORMI		VGSI and RNAV glidepath not coincident (VGSI 3.00 Angle/TCH 67).		4 NM Holding Pattern	
*LNAV only.		HATFI 1.8 NM to RW27L		JUZSO	
*1 NM to RW27L		OSTAF 1300		6000 2100	
RW27L		680*		GP 3.00° TCH 50	
1 NM 0.8 NM 1.9 NM 6.3 NM					
CATEGORY	A	B	C	D	
LPV DA	393-1		321 (400-1)		
LNAV/VNAV DA	451-1		379 (400-1)		
LNAV MDA	540-1	468 (500-1)	540-1⅓	468 (500-1⅓)	
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1½ 520 (600-1½)	640-2 560 (600-2)	