

WAAS CH <b>49106</b> <b>W33A</b>	APP CRS <b>326°</b>	Rwy Ldg <b>10179</b> TDZE <b>93</b> Apt Elev <b>100</b>
--	------------------------	---



RNAV (GPS) RWY 33  
COLD BAY (CDB) (PACD)

RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cat B/C/D southwest of Rwy 15-33.

MISSED APPROACH: Climb to 3000 direct DEADS and hold.

ASOS <b>135.75</b>	ANCHORAGE CENTER <b>118.5 278.3</b>	COLD BAY RADIO <b>123.6 (CTAF) 0</b>
-----------------------	--	---

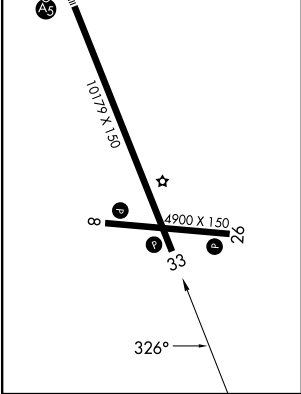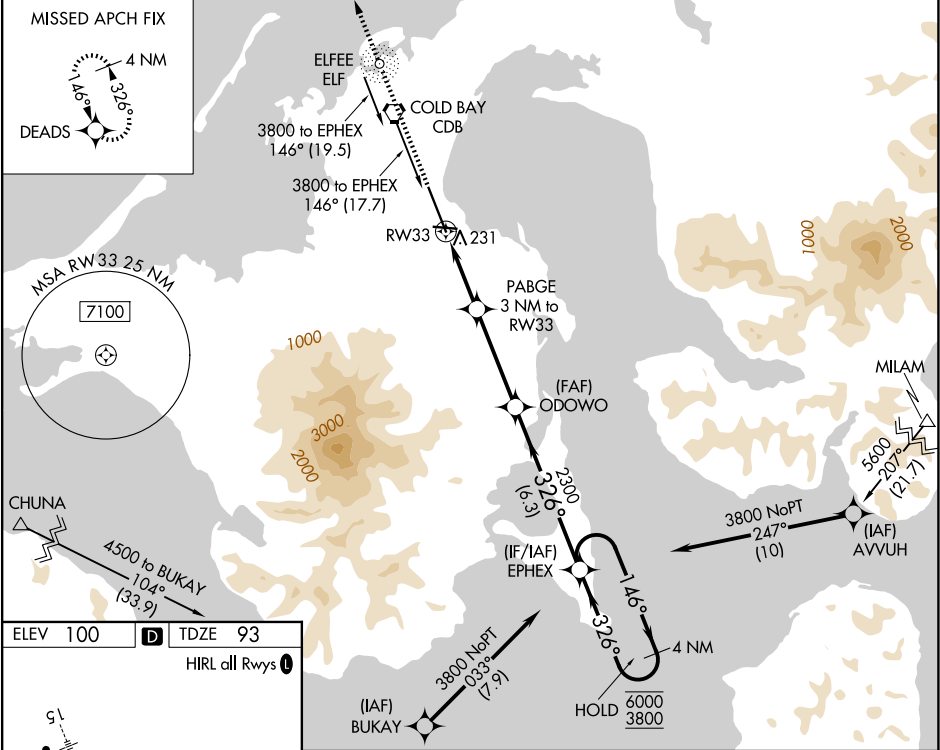

3000	DEADS	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 36).			
*LNAV only		PABGE 3 NM to RW33	ODOWO 2300	EPHEX 4 NM Holding Pattern	
*1.2 NM to RW33		1100*	2300	146°	6000 3800
1.2 NM		1.8 NM	3.8 NM	6.3 NM	GP 3.00° TCH 55
CATEGORY	A	B	C	D	
LPV	DA	293-¾ 200 (200-¾)			
LNAV/VNAV	DA	392-⅞ 299 (300-⅞)			
LNAV	MDA	500-1 407 (400-1)		500-1½ 407 (400-1½)	
CIRCLING	540-1 440 (500-1)	560-1 460 (500-1)	560-1½ 460 (500-1½)	860-2½ 760 (800-2½)	