

VORTAC CDB	APP CRS	Rwy Ldg
112.6	145°	10179
Chan 73		TDZE 75
		Apt Elev 100

VOR RWY 15

COLD BAY (CDB) (PACD)

DME required.

⚠

Circling NA for Cat A southwest of Rwy 15-33 at night.  
DME values will decrease then increase prior to reaching missed approach point. For inop ALS, increase S-15 Cats C and D visibility to RVR 6000. Circling NA for Cats B/C/D southwest of Rwy 15-33


MALSR

⚡

A5

MISSED APPROACH: Climb to 1200 then climbing left turn to 2700 direct CDB VORTAC and hold; continue climb-in-hold to 2700.

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 1
----------------	---------------------------------	----------------------------------

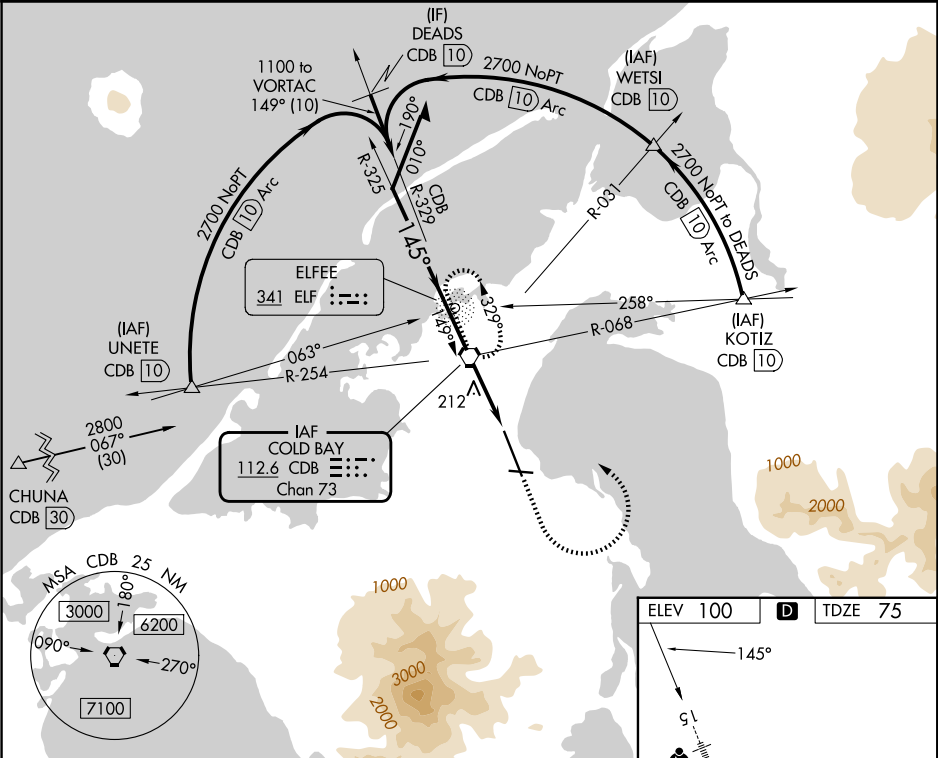

Remain within 10 NM				
CDB VORTAC				
2700				
325°				
145°				
1100				
3.10 TCH 50				
1.7 NM				
1.3 NM				
CATEGORY	A	B	C	D
S-15	480/24	405 (400-½)	480/40	405 (400-¾)
CIRCLING	540-1 440 (500-1)	560-1 460 (500-1)	560-1½ 460 (500-½)	860-2½ 760 (800-2½)