RNAV (RNP) Z RWY 6L

GUAM INTL (GUM)(PGUM)

APP CRS	Rwy Ldg	11014
063°	TDZE	256
	Apt Elev	305

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. For inop ALS, increase RNP *0.30 all Cats visibility to ¾ SM and RNP 0.30 all Cats visibility to 1⅛ SM.
*Missed approach requires a minimum climb of 276 feet per NM to 1400.

MALSR

MISSED APPROACH: Climb to 3000 via track 063° to WABOX and hold.

ATIS	GUAM CERAP	AGANA TOWER	GND CON	CLNC DEL
119.0	119.8 269.0	118.1 340.2	121.9 336.4	121.9

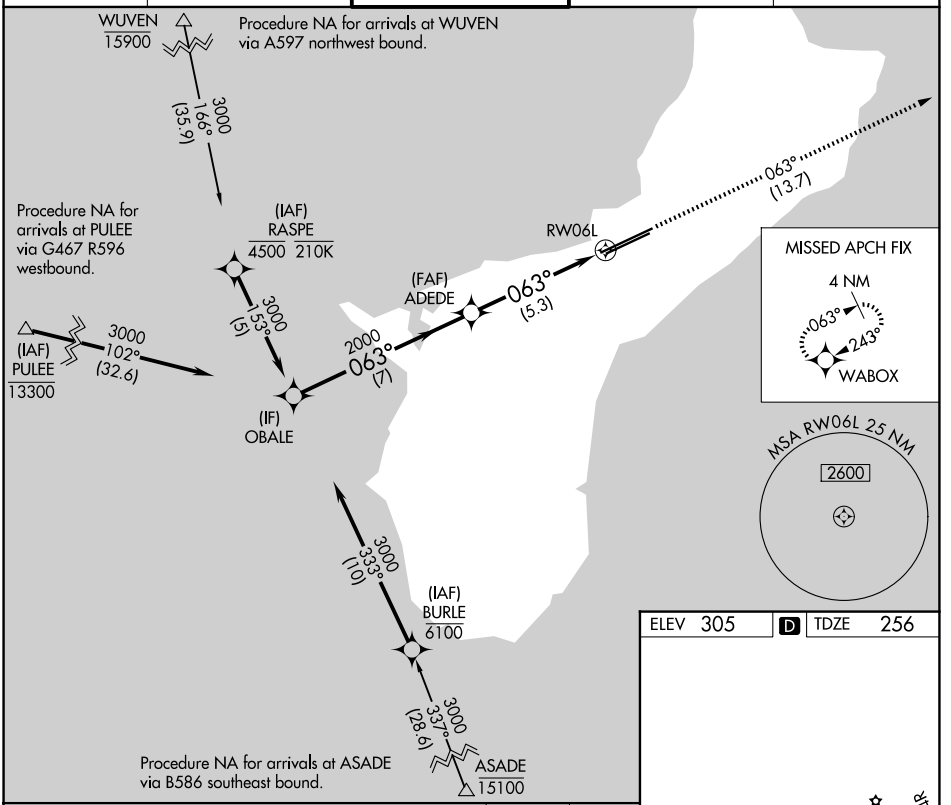

ELEV 305 D TDZE 256



HIRL all Rwys

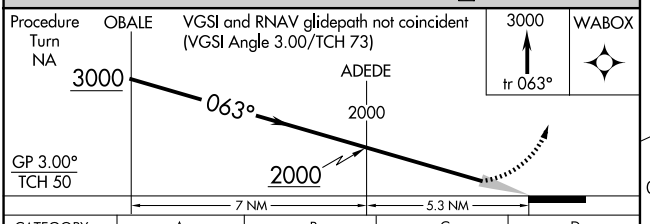

CATEGORY	A	B	C	D
RNP 0.30* DA	514-½	258 (300-½)		
RNP 0.30 DA	656- ⅝	400 (400- ⅝)		

AUTHORIZATION REQUIRED

PAC, 07 AUG 2025 to 02 OCT 2025
PAC, 07 AUG 2025 to 02 OCT 2025