


WAAS CH 40330 W28A	APP CRS 285°	Rwy Ldg 5018 TDZE 50 Apt Elev 52
--	------------------------	---

RNAV (GPS) RWY 28L

HAYWARD EXEC (HWD)

RNP APCH - GPS.	MISSED APPROACH: Climb to 600 then climbing right turn to 2100 direct OAK VOR/DME and hold.
-----------------	---

ATIS 126.7	NORCAL APP CON 124.4 351.8	HAYWARD TOWER★ 120.2 (CTAF) 257.8	GND CON 121.4	CLNC DEL 128.05	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------	---------------------------	-------------------------

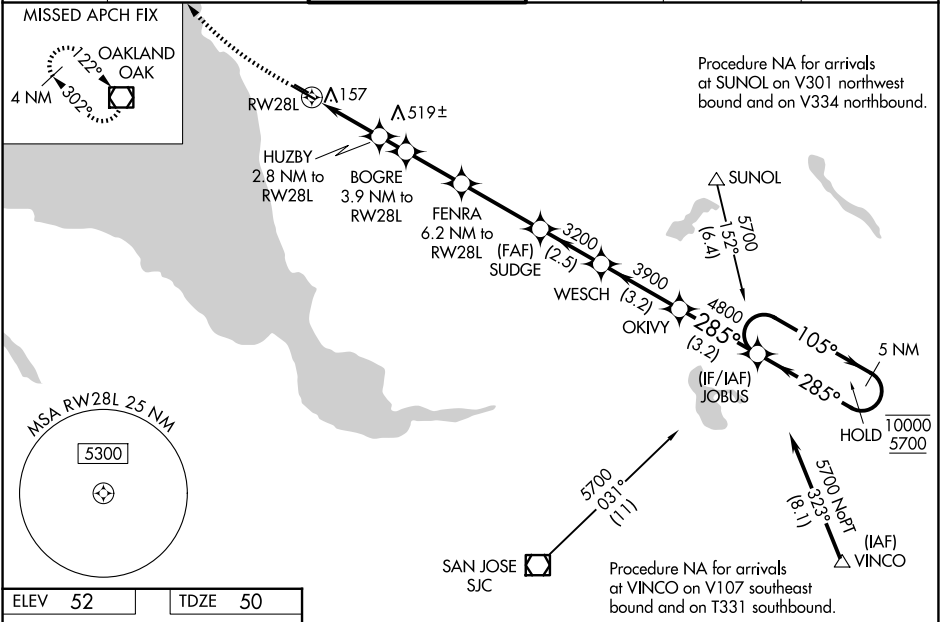

ELEV 52	TDZE 50	600	2100	OAK	VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 35).	OKIVY	JOBUS	5 NM
						Holding Pattern		
						105°→ 10000		
						←285° 5700		
						GP 3.10°		
						TCH 35		
						0.9 1.9 1.1 NM 2.3 NM 3.3 NM 2.5 NM 3.2 NM 3.2 NM		
						CATEGORY A B C D		
						LPV DA 348-1 298 (300-1)		
						LNAV/VNAV DA 439-1½ 389 (400-1½)		
						LNAV MDA 460-1 410 (500-1) 460-1½ 410 (500-1½)		
						CIRCLING 540-1 488 (500-1) 540-1½ 488 (500-1½) 920-2¾ 868 (900-2¾)		