


| | | |
|--|------------------------|--|
| WAAS CH 69617 W36A | APP CRS 355° | Rwy Ldg TDZE Apt Elev 6080 40 46 |
|--|------------------------|--|

RNAV (GPS) Y RWY 36


CORPUS CHRISTI INTL (CRP)

| | | | |
|---|--|-------|--|
| RNP APCH - GPS. | | MALSR | MISSED APPROACH: Climb to 2000 direct FEKEL and on track 304° to ATHIS and hold. |
| ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA. | | AS | |

| | | | | |
|----------------------|--|------------------------------------|--------------------------------|---------------------------|
| ATIS 126.8 | CORPUS APP CON 120.9 348.725 | CORPUS TOWER 119.4 257.8 | GND CON 121.9 269.15 | CLNC DEL 118.55 |
|----------------------|--|------------------------------------|--------------------------------|---------------------------|

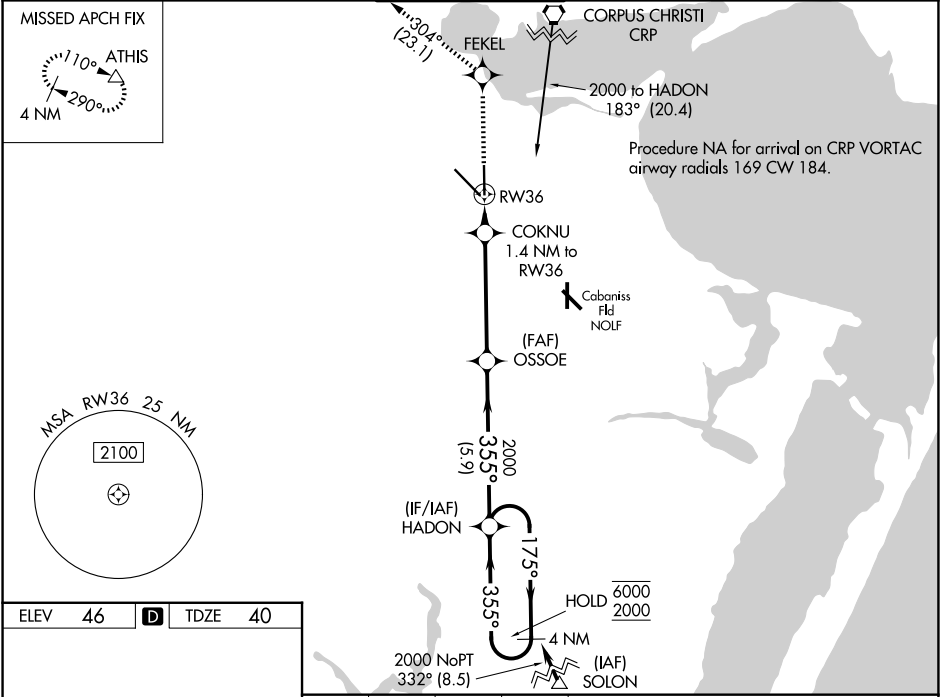

| | | |
|---------|----------|---------|
| ELEV 46 | D | TDZE 40 |
|---------|----------|---------|

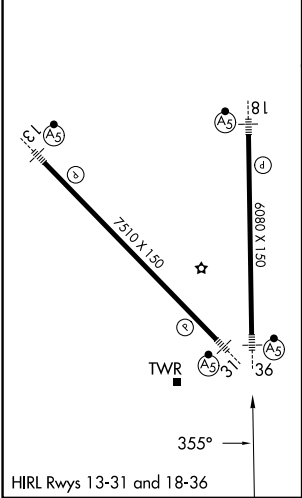

| | | | | | |
|--------------|----------------------|----------------------|------------------------|------------------------|----------------------------|
| 2000 | FEKEL | ATHIS | OSSOE | HADON | 4 NM Holding Pattern |
| ↑ | tr 304° | △ | 2000 | 355° | 175° → 6000 ← 355° 2000 |
| | COKNU 1.4 NM to RW36 | | 520 | | GP 3.00° TCH 53 |
| | 1.4 NM | 4.6 NM | 5.9 NM | | |
| CATEGORY | A | B | C | D | E |
| LPV DA* | 240/24 | | 200 (200-½) | | |
| LNAV/VNAV DA | 356/24 | | 316 (400-½) | | |
| LNAV MDA | 440/24 | 400 (400-½) | 440/35 | 400 (400-¾) | |
| CIRCLING | 500-1 454 (500-1) | 780-1 734 (600-1) | 820-2¼ 774 (800-2¼) | 820-2½ 774 (800-2½) | 820-2¾ 774 (800-2¾) |