RNAV (GPS) RWY 35

ACADIANA RGNL (ARA)

WAAS	APP CRS	Rwy Idg	8002
CH 40301	348°	TDZE	21
W35A		Apt Elev	24

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM and LNAV Cats C/D visibility to 1 SM. Circling NA to Rwys 17W and 35W.

MALSR

MISSED APPROACH: Climb to 440 then climbing right turn to 2000 direct LULEW and hold.

ASOS	LAFAYETTE APP CON ★	ACADIANA TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM	
133.325	121.1 268.7	125.0 (CTAF) L 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7 L

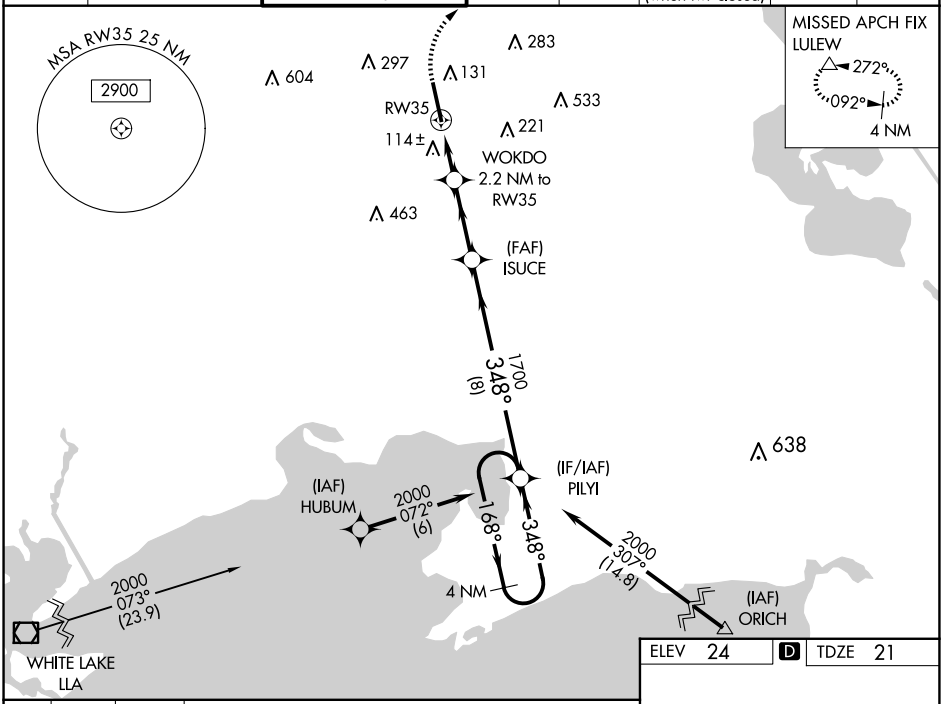

ELEV 24 D TDZE 21

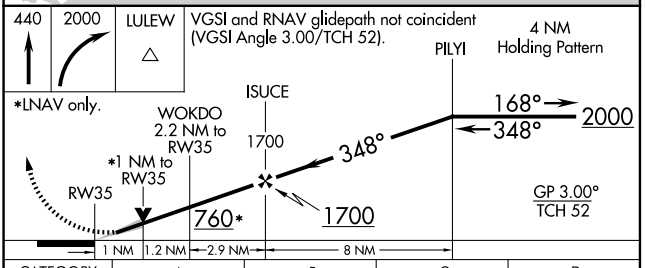

CATEGORY	A	B	C	D
LPV DA	221-½	200 (200-½)		
LNAV/VNAV DA	303-½	282 (300-½)		
LNAV MDA	380-½	359 (400-½)	380-¾	359 (400-¾)
C CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)

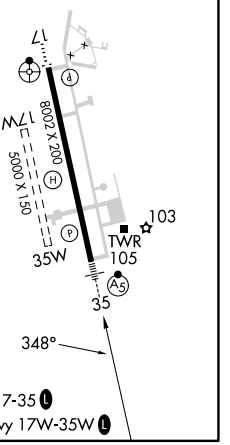

HIRL Rwy 17-35 L
Seaway Rwy 17W-35W L

SC-4, 07 AUG 2025 to 04 SEP 2025
SC-4, 07 AUG 2025 to 04 SEP 2025