


WAAS CH 90417 W11A	APP CRS 114°	Rwy Idg TDZE 539 Apt Elev 544
--	------------------------	---

RNAV (GPS) RWY 11

ST LOUIS RGNL (ALN)

RNP APCH.		MISSED APPROACH: Climb to 2100 direct QUNIE and hold.		
▼ ▲ Rwy 11 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.				
ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER★ 126.0 (CTAF) 0 239.0	GND CON 120.2	CLNC DEL 120.2 (when tower closed)
			UNICOM 122.95	

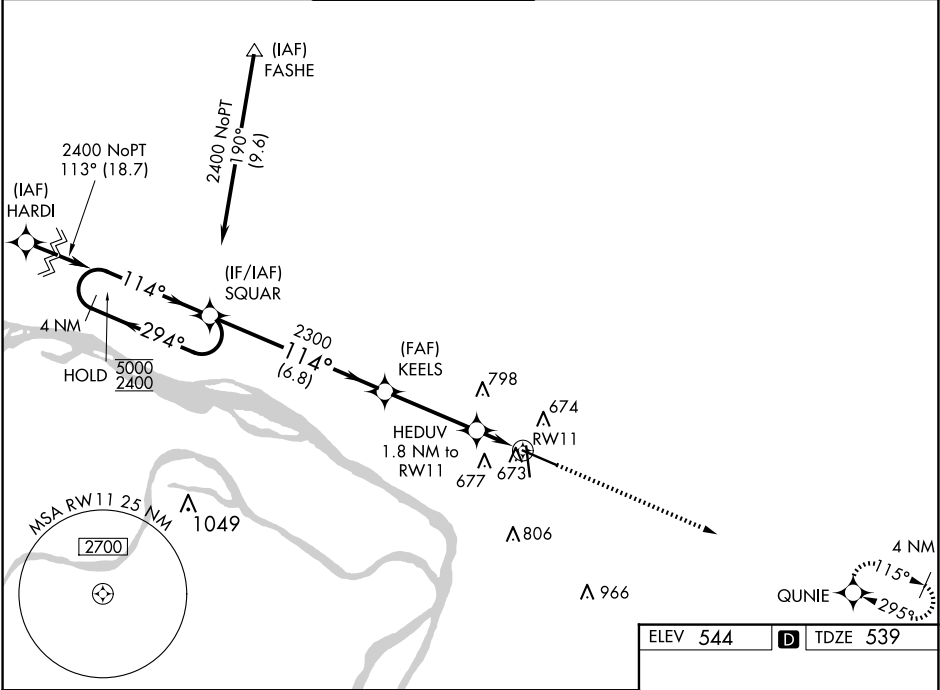

4 NM Holding Pattern		SQUAR		KEELS		HEDUV		RW11	
5000 2400		294° 114°		114° 2300		1.8 NM to RW11		1.3 NM to RW11	
GP 3.00° TCH 46		6.8 NM		3.6 NM		0.5 NM		1.3	
CATEGORY		A		B		C		D	
LPV DA		794-7/8		255 (300-7/8)					
LNAV/VNAV DA		881-1 1/8		342 (400-1 1/8)					
LNAV MDA		980-1 441 (500-1)		980-1 3/8 441 (500-1 3/8)					
CIRCLING		1000-1 456 (500-1)		1160-1 3/4 616 (700-1 3/4)		1200-2 656 (700-2)			

