

| | | |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|
| LOC/DME I-LER 109.7 Chan 34 | APP CRS 340° | Rwy Ldg 7100 TDZE 1232 Apt Elev 1232 |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|

ILS or LOC/DME RWY 34
BRainerd LAKES RGNL (BRD)

RNP APCH-GPS. from GOLLF.
DME required, ADF required.


T VDP NA with Aitkin altimeter setting. When local altimeter setting not received, use Aitkin altimeter setting: increase all DA to 1484;
A **NA** increase all MDAs 60 feet and visibility S-LOC 34 Cat C/D ¼ SM and visibility Circling Cat D ¼ SM.

MALSR



MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct BR LOM, continue climb-in-hold to 4000.

| | | |
|------------------------|-------------------------------------------|---------------------------------|
| ASOS 126.775 | MINNEAPOLIS CENTER 118.05 239.0 | UNICOM 122.7 (CTAF) 0 |
|------------------------|-------------------------------------------|---------------------------------|

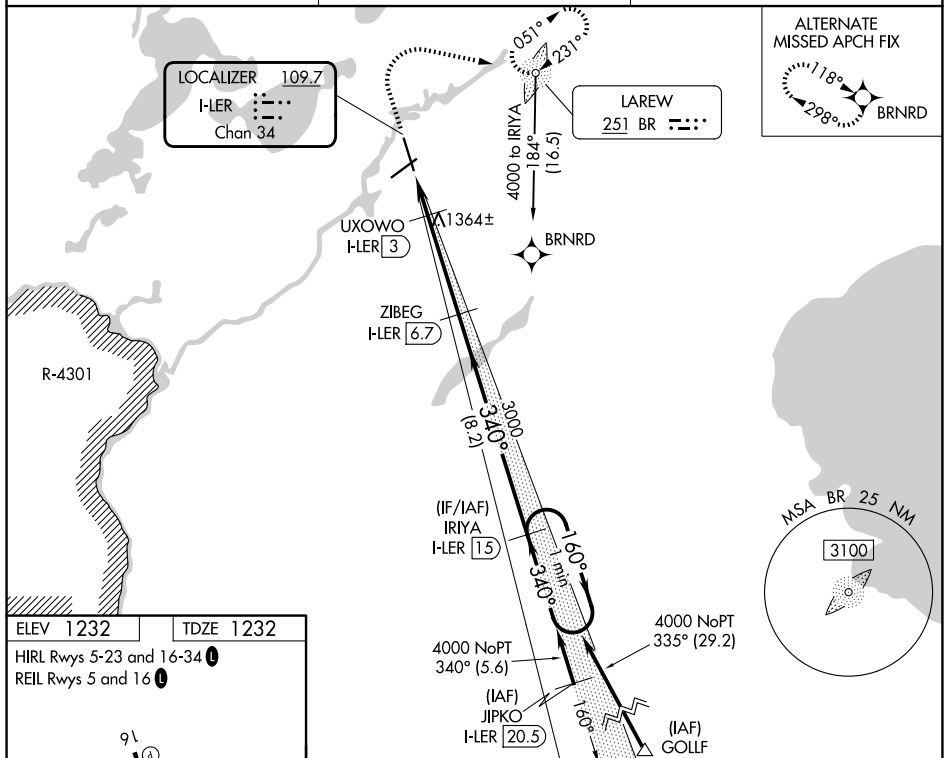

| 1700 ↑ | 4000 | BR | ZIBEG I- <u>LER</u> 6.7 | IRIYA I- <u>LER</u> 15 | One Minute Holding Pattern |
|--------------------------------|--------------------|--------------------------|----------------------------|---------------------------|----------------------------|
| *LOC only I- <u>LER</u> 1.3 | *I- <u>LER</u> 2.4 | UXOWO I- <u>LER</u> 3 | 3000 340° 3000 | 160° → 4000 ← 340° | GS 3.00° TCH 46 |
| 1.1 NM | 0.6 | 3.7 NM | 8.2 NM | | |
| CATEGORY | A | B | C | D | |
| S-ILS 34 | 1432-½ | | 200 (200-½) | | |
| S-LOC 34 | 1620-½ | 388 (400-½) | 1620-⅝ | 388 (400-⅝) | |
| CIRCLING | 1760-1 | 528 (600-1) | 1760-1½ 528 (600-1½) | 1860-2 628 (700-2) | |