


LOC I-BVI	APP CRS	Rwy Idg	4501
109.3	101°	TDZE	1238
		Apt Elev	1253

LOC RWY 10

BEAVER COUNTY (BVI)

DME or RADAR REQUIRED	MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct EWC VOR/DME and hold.
<div><div>▼</div><div>▲</div></div> <div>Rwy 10 helicopter visibility reduction below ¾ SM NA. When local alimeter setting not received, use Pittsburgh Intl alimeter setting and increase all MDAs 60 feet and visibility S-10 Cats C and D ¼ SM. Circling Rwy 28 NA at night.</div>	

ATIS	PITTSBURGH APP CON	BEAVER COUNTY TOWER ★	GND CON	CLNC DEL
118.35	124.75 338.2	120.3 (CTAF) 0	121.8	124.85 (when twr closed)

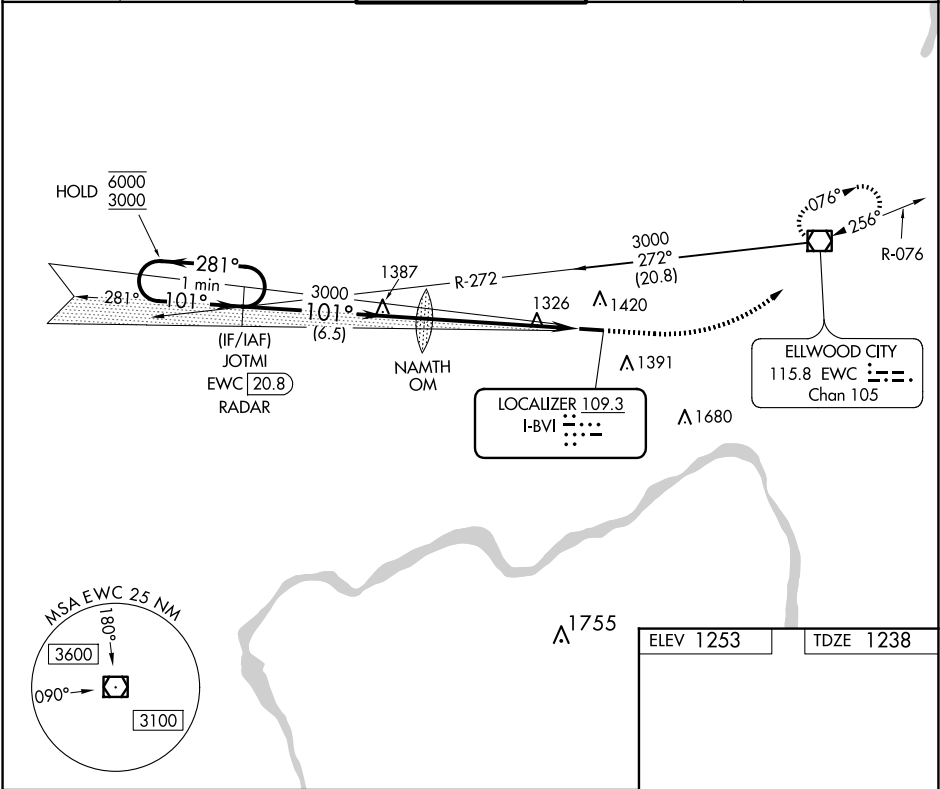

One Minute Holding Pattern		JOTMI EWC 20.8 RADAR	NAMTH OM	2000	3000	EWC
<div>6000 ← 281°</div> <div>3000 ← 101°</div>		<div>101° →</div> <div>3000</div>	<div>2.94°</div> <div>TCH 42</div>			<div>101°</div>
		6.5 NM	5.6 NM			
CATEGORY	A	B	C	D	MIRL Rwy 10-28 0	
S-10	1640-1	402 (400-1)	1640-1½	402 (400-1½)	REIL Rwys 10 and 28 0	
CIRCLING	1720-1	467 (500-1)	1720-1½	1820-2	FAF to MAP 5.6 NM	
			467 (500-1½)	567 (600-2)	Knots	60 90 120 150 180
					Min:Sec	5:36 3:44 2:48 2:14 1:52