WAAS	APP CRS	Rwy Idg	6501
CH 82405	184°	TDZE	769
W19A		Apt Elev	772

RNAV (GPS) RWY 19

FREMONT MUNI (FFX)

Baro-VNAV NA when using Muskegon altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). Rwy 19 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Muskegon altimeter setting and increase all DA 65 feet, and all visibilities ¼ mile. Increase all MDA 80 feet, and Cat C/D visibilities ¼ mile. VDP NA when using Muskegon altimeter setting.

MISSED APPROACH: Climb to 2900 direct SACOL and hold.

AWOS-3	GREAT LAKES APP CON ★	CLNC DEL	UNICOM
118.775	119.8 290.35	118.25	123.0 (CTAF) L

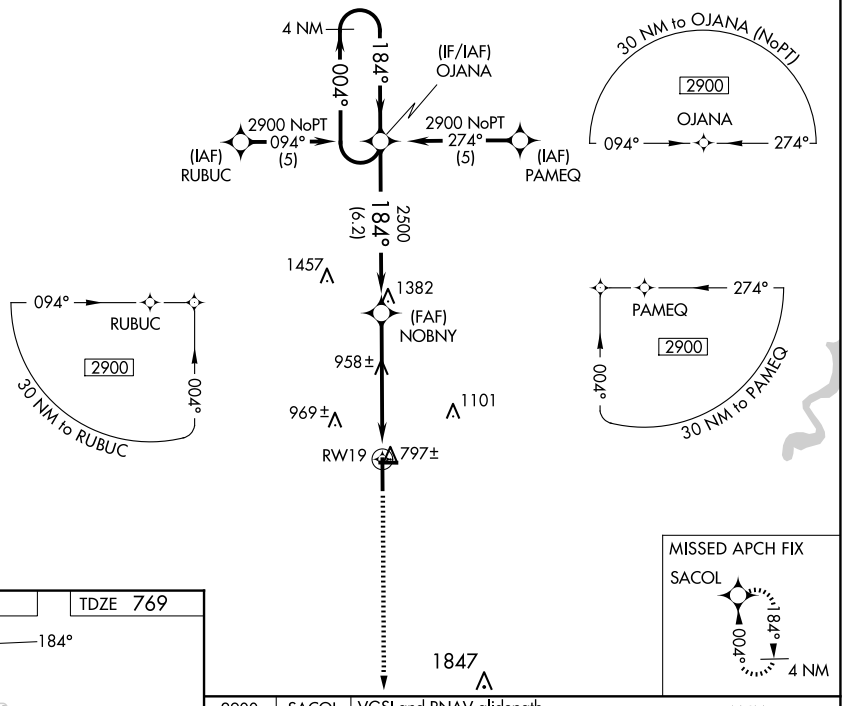

MISSED APCH FIX
SACOL
184°
004°
4 NM

ELEV 772 TDZE 769

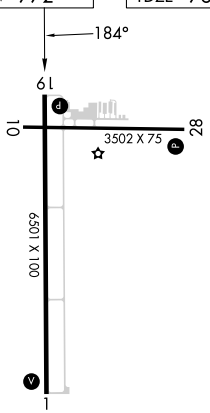

REIL Rwys 1 and 19 L
MIRL Rwys 1-19 and 10-28 L

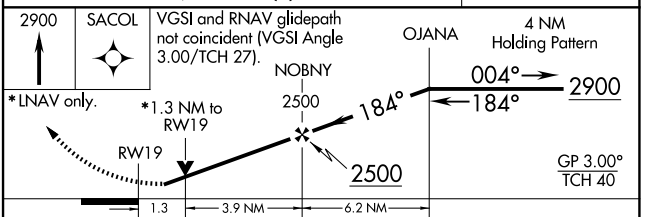

CATEGORY	A	B	C	D
LPV DA	1074-1 305 (400-1)			
LNAV/VNAV DA	1295-2 526 (600-2)			
LNAV MDA	1220-1 451 (500-1)		1220-1¼ 451 (500-1¼)	1220-1½ 451 (500-1½)
CIRCLING	1260-1 488 (500-1)		1460-2 688 (700-2)	1460-2¼ 688 (700-2¼)

EC-1, 07 AUG 2025 to 04 SEP 2025
EC-1, 07 AUG 2025 to 04 SEP 2025