RNAV (GPS) RWY 13

JOHN F KENNEDY MEML (ASX)

WAAS	APP CRS	Rwy Idg	3498
CH 61107	132°	TDZE	827
W13A		Apt Elev	827

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Ironwood altimeter setting. When local altimeter setting not received, use Ironwood altimeter setting and increase all DAs 132 feet and all MDAs 140 feet; increase LPV, LNAV/VNAV all Cats, and LNAV Cat C/D visibility ⅜ mile and Circling Cat C/D visibility ½ mile.

MISSED APPROACH: Climb to 3500 direct JILUL and hold.

ASOS	MINNEAPOLIS CENTER	GCO	UNICOM
126.775	126.45 276.4	122.25	122.8 (CTAF) L

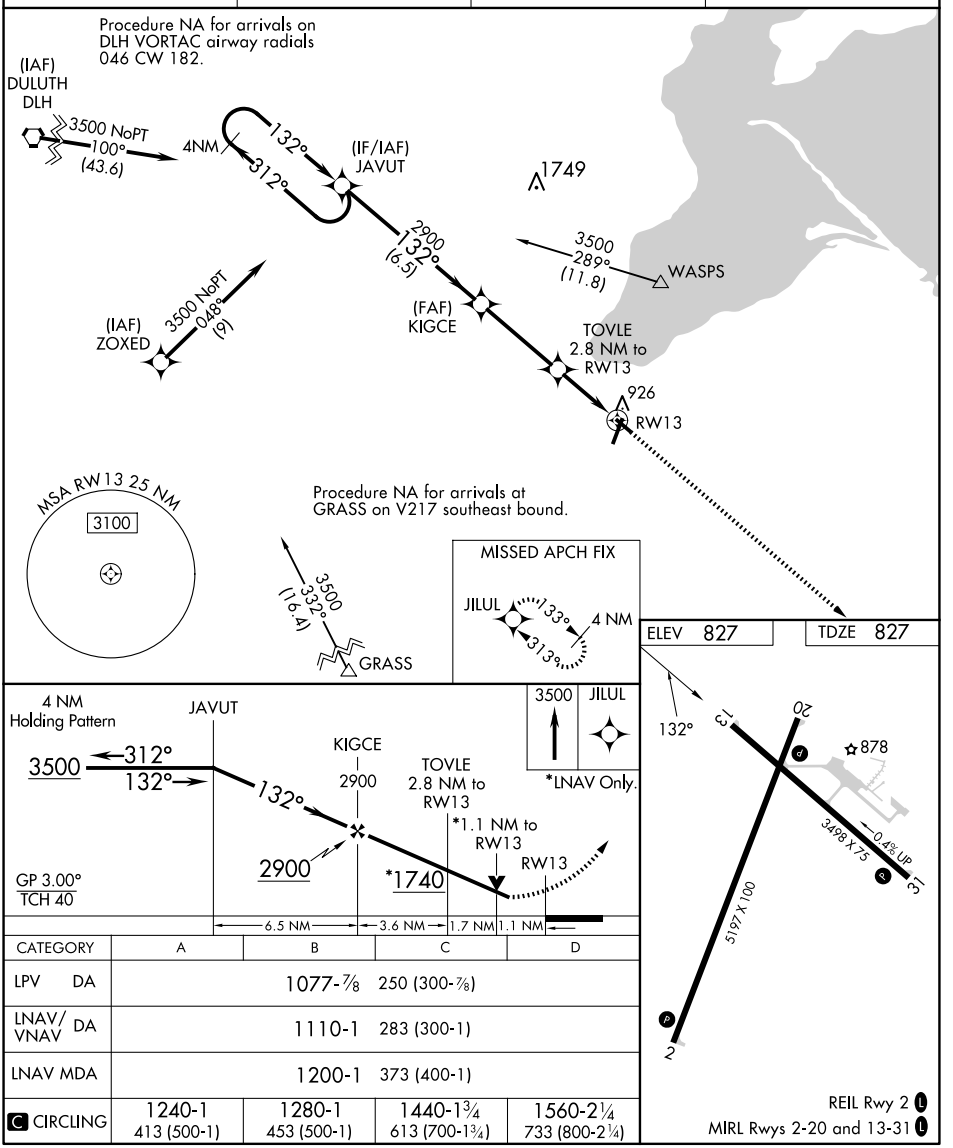

CATEGORY	A	B	C	D
LPV DA	1077-⅞	250 (300-⅞)		
LNAV/VNAV DA	1110-1	283 (300-1)		
LNAV MDA	1200-1	373 (400-1)		
C CIRCLING	1240-1 413 (500-1)	1280-1 453 (500-1)	1440-1¾ 613 (700-1¾)	1560-2¼ 733 (800-2¼)

REIL Rwy 2 L
MIRL Rwys 2-20 and 13-31 L

EC-3, 07 AUG 2025 to 04 SEP 2025
EC-3, 07 AUG 2025 to 04 SEP 2025