
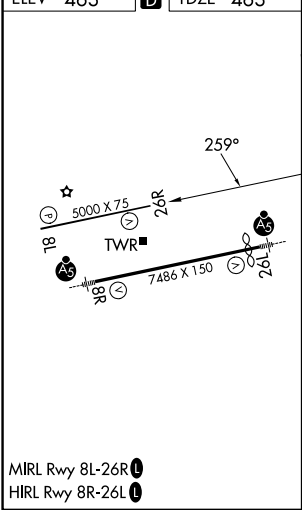


WAAS CH 97414 W26A	APP CRS 259°	Rwy Ldg TDZE 463 Apt Elev 463
--	------------------------	---

RNAV (GPS) RWY 26R

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.					MISSED APPROACH: Climb to 3000 direct EXESS and hold.	
<div><div><div>▼</div><div>⚠</div></div><div>Baro-VNAV and VDP NA when using St Louis Lambert Intl altimeter setting. Rwy 26R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase LPV DA to 798 feet and all visibilities ½ SM, increase LNAV/VNAV DA to 823 feet and all visibilities ½ SM; increase all MDAs 60 feet.</div></div>						
ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER★ 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)	UNICOM 122.95

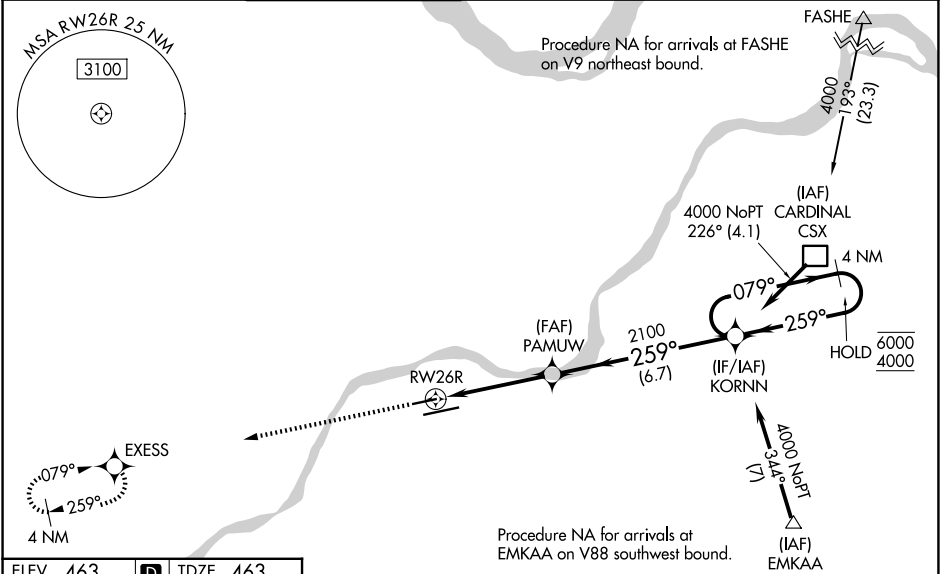

<div>3000</div> <div>EXESS</div>		KORNN		4 NM Holding Pattern
<div>2100</div> <div>PAMUW</div>		<div>2100</div> <div>259°</div>		<div>079°</div> <div>6000</div> <div>4000</div>
<div>1.2 NM</div> <div>3.1 NM</div> <div>6.7 NM</div>		<div>GP 3.50°</div> <div>TCH 47</div>		
CATEGORY	A	B	C	D
LPV DA	755-7/8	292 (300-7/8)	NA	
LNAV/VNAV DA	780-7/8	317 (400-7/8)	NA	
LNAV MDA	940-1	477 (500-1)	NA	
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	NA	