# RNAV (GPS) RWY 17

## ALBERT LEA MUNI (AEL)

| WAAS | APP CRS | Rwy Idg | 5000 |
|---|---|---|---|
| CH 49204 | 167° | TDZE | 1260 |
| W17A | | Apt Elev | 1261 |

RNP APCH.

Baro-VNAV NA when using Austin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 36°C. Rwy 17 helicopter visibility reduction below ¾ SM NA. VDP NA with Austin altimeter setting. When local altimeter setting not received, use Austin altimeter setting and increase all DA 48 feet and all MDA 60 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats, and LNAV Cat C/D visibility ⅛ mile.

ODALS

MISSED APPROACH: Climb to 2900 direct YEDUT and hold.

| AWOS-3PT | ROCHESTER APP CON ★ | UNICOM |
|---|---|---|
| 119.575 | 119.8 251.125 | 123.0 (CTAF) L |

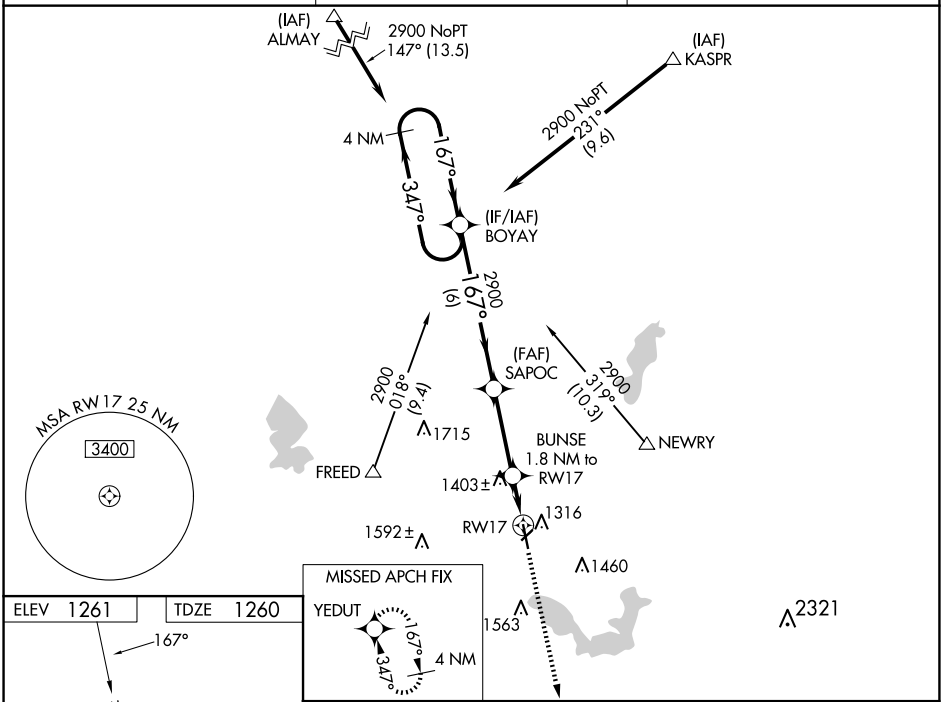


| ELEV 1261 | TDZE 1260 |
|---|---|

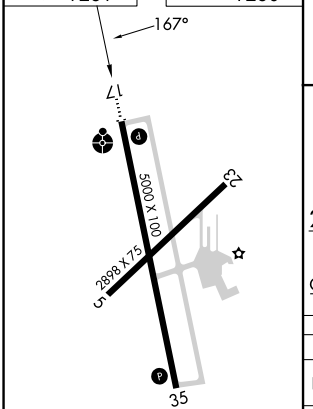


MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

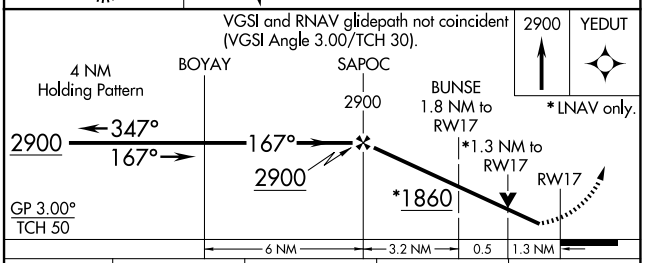


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1510-¾ 250 (300-¾) | | | |
| LNAV/VNAV DA | 1510-¾ 250 (300-¾) | | | |
| LNAV MDA | 1700-1 440 (500-1) | | 1700-1¼ 440 (500-1¼) | |



NC-1, 07 AUG 2025 to 04 SEP 2025
NC-1, 07 AUG 2025 to 04 SEP 2025