WAAS	APP CRS	Rwy Idg	5287
CH 65941	045°	TDZE	927
W05A		Apt Elev	927

RNAV (GPS) RWY 5

LAKE CUMBERLAND RGNL (SME)

RNP APCH - GPS.

Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Monticello altimeter setting. When local altimeter setting not received, use Monticello altimeter setting and increase LPV DA to 1221 feet, increase LNAV/VNAV DA to 1591 feet. Increase LPV and LNAV/VNAV visibilities all Cats ⅛ SM. Increase all MDAs 60 feet, increase LNAV Cat C and D visibility ⅛ SM, and Circling Cat B ¼ SM.

MISSED APPROACH: Climb to 3600 direct AZLEC and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
120.05	124.625 371.925	122.8 (CTAF) L

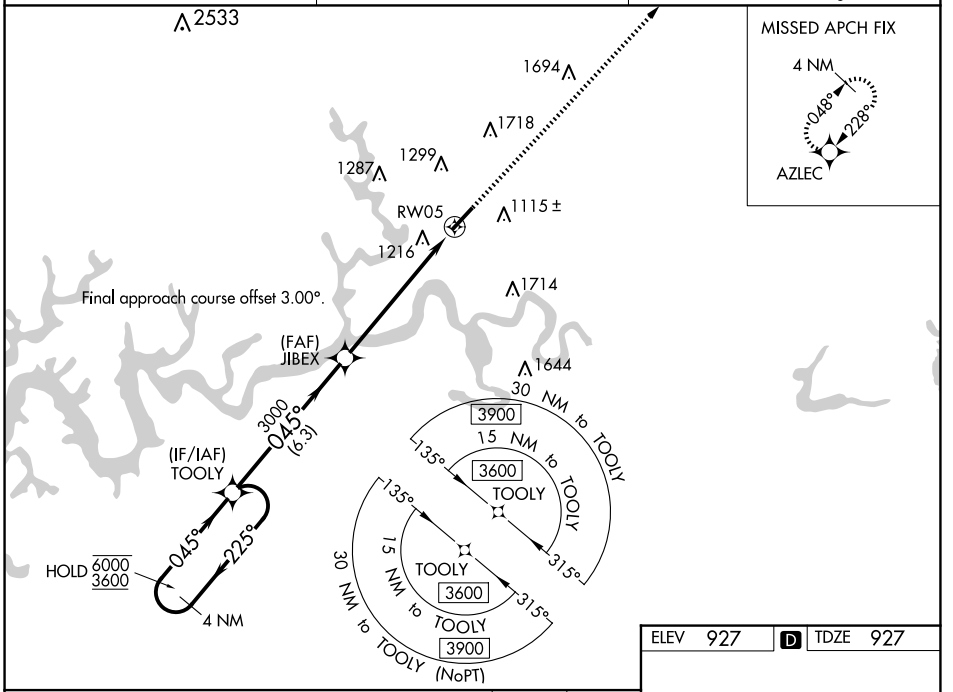

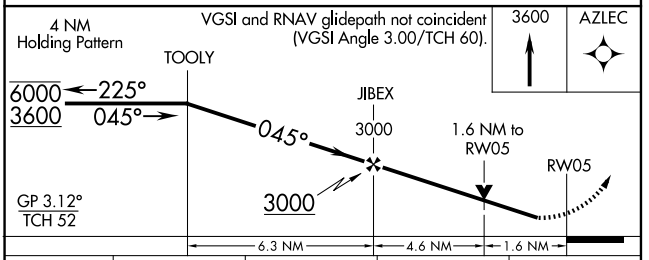

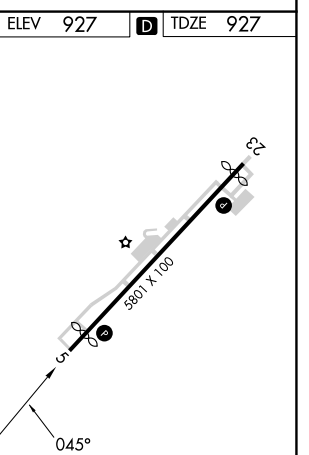

CATEGORY	A	B	C	D
LPV DA	1177-¾ 250 (300-¾)			
LNAV/VNAV DA	1547-1¾ 620 (700-1¾)			
LNAV MDA	1480-1 553 (600-1)		1480-1⅝ 553 (600-1⅝)	
CIRCLING	1580-1 653 (700-1)	1700-1 773 (800-1)	2100-3 1173 (1200-3)	

SE-1, 07 AUG 2025 to 04 SEP 2025
SE-1, 07 AUG 2025 to 04 SEP 2025