


WAAS CH <b>69601</b> <b>W13A</b>	APP CRS <b>132°</b>	Rwy Idg <b>5002</b> TDZE <b>962</b> Apt Elev <b>962</b>
--	------------------------	---

RNAV (GPS) RWY 13

LIVINGSTON COUNTY SPENCER J HARDY (OZW)

RNP APCH.	MALSRR	MISSED APPROACH: Climb to 2800 direct BROVI and hold.
<div><div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 37°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.</div></div>	<div><div></div><div></div></div>	

AWOS-3 <b>118.875</b>	DETROIT APP CON <b>132.35 284.0</b>	CLNC DEL <b>121.725 (GCO)</b>	UNICOM <b>123.0 (CTAF) 0</b>
--------------------------	--	----------------------------------	---------------------------------

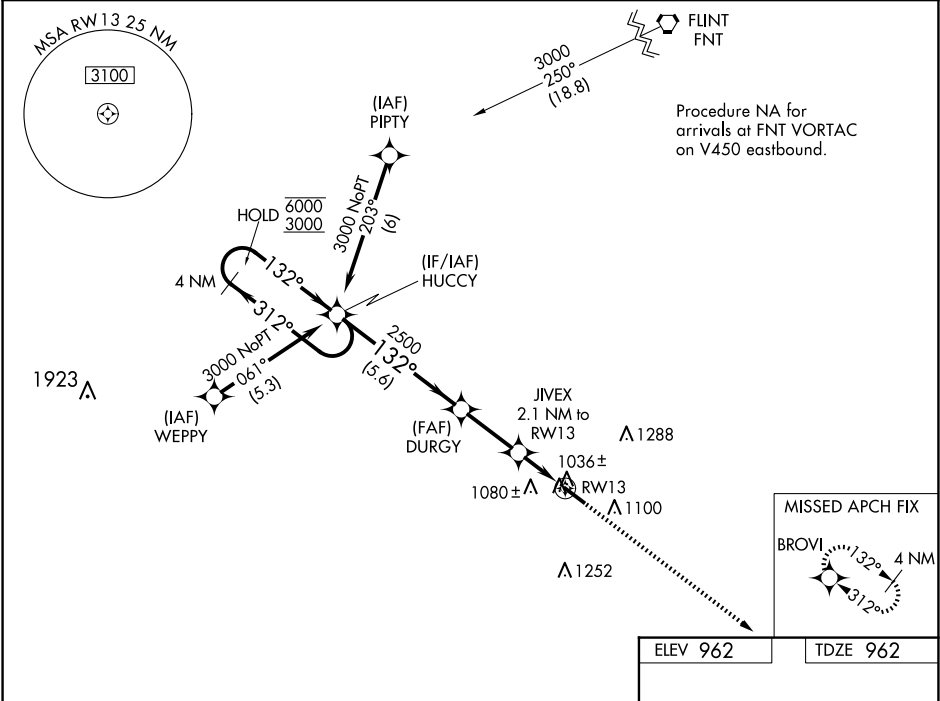

4 NM Holding Pattern HUCCY					2800 BROVI
6000 ← 312° 3000 132° →					JIVEX 2.1 NM to RW13 *LNAV only
GP 3.00° TCH 48					*0.9 NM to RW13
5.6 NM 2500 132°					RW13
2.6 NM 1660					
1.2 NM 0.9 NM					
CATEGORY	A	B	C	D	
LPV DA		1162-½	200 (200-½)		
LNAV/VNAV DA		1212-½	250 (300-½)		
LNAV MDA		1300-½	338 (400-½)		
CIRCLING	1400-1 438 (500-1)	1420-1 458 (500-1)	1600-1¾ 638 (700-1¾)	1600-2 638 (700-2)	

