

WAAS CH 49130 W31A	APP CRS 315°	Rwy Idg TDZE 1203 Apt Elev 1204	5506
--	------------------------	---	-------------

RNAV (GPS) RWY 31

ARTHUR N NEU (CIN)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting: increase LPV DA to 1515 feet; increase LNAV/VNAV DA to 1515 feet and increase all MDAs 80 feet and visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct AMABE and hold.

AWOS-3 118.025	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

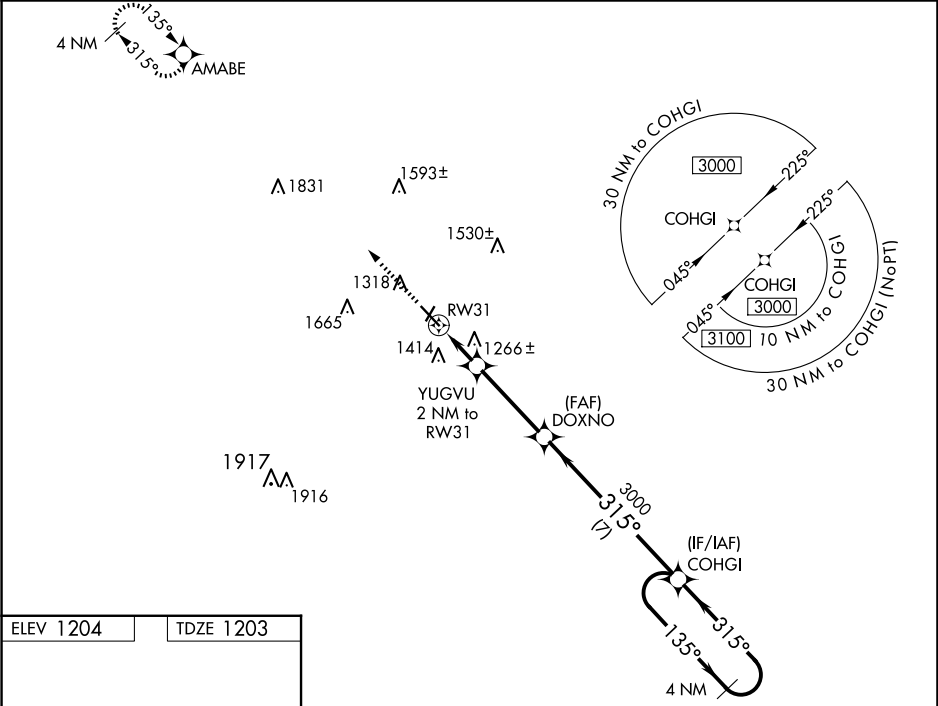

ELEV 1204 TDZE 1203

MIRL Rwy 13-31 and 3-21 0
REIL Rwy 3, 13, 21 and 31 0

3000 ↑	AMABE 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).				4 NM Holding Pattern	
*LNAV only.							
		GP 3.00° TCH 40					
		0.9 NM → 1.1 NM → 3.5 NM → 7 NM →					
CATEGORY	A		B		C		D
LPV DA	1453-1		250 (300-1)				NA
LNAV/ VNAV DA	1453-1		250 (300-1)				NA
LNAV MDA	1520-1		317 (400-1)				NA
CIRCLING	1740-1		536 (600-1)		1980-2¼ 776 (800-2¼)		NA