

HI-ILS Z or LOC Z RWY 26

| | | |
|---------------------------|-------------------------|--|
| LOC I-PEK 110.3 | APCH CRS 257° | Rwy Idg 10,000 TDZE 27 Arpt Elev 30 |
|---------------------------|-------------------------|--|

[USAF]

JACKSONVILLE INTL (KJAX)


DME required. RADAR required for procedure entry.

- ▼ * When ALS inop, increase CAT E RVR to 40, vis to ¾ mile.
** When ALS inop, increase vis to 1 ¾ miles.
*** When ALS inop, increase RVR to 55, vis to 1 mile.




MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on heading 360° and CRG R-316 to HAMOC 23 DME and hold, continue climb-in-hold to 4000.


| | | | | |
|-----------------------|-------------------------------|-----------------------------|-------------------------------|----------------------------------|
| ATIS 125.85 | APP CON 119.0 269.9 | TOWER 118.3 317.7 | GND CON 121.9 348.6 | CLNC DEL 119.5 290.275 |
|-----------------------|-------------------------------|-----------------------------|-------------------------------|----------------------------------|

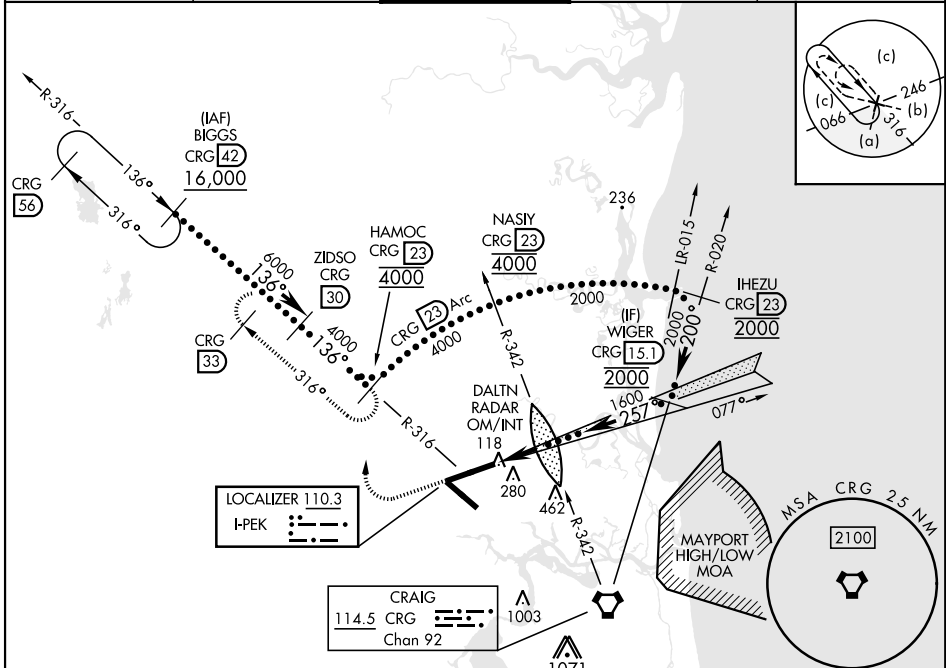

EMERG SAFE ALT 100 NM 2600

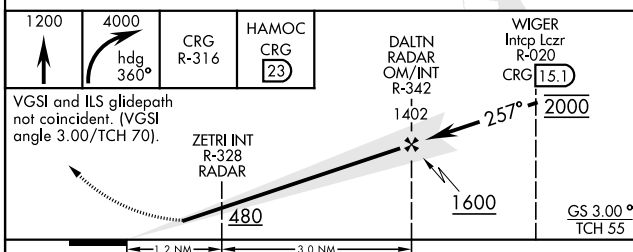

| CATEGORY | C | D | E |
|--|------------------------|----------------------|------------------------|
| S-ILS 26* | 227/18 | 200 (200-½) | |
| S-LOC 26** | 480/45 | 453 (500-¾) | |
| CIRCLING | 580-1½ 550 (600-1½) | 580-2 550 (600-2) | 760-2½ 730 (800-2½) |
| ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) | | | |
| S-LOC 26*** | 400/35 | 373 (400-¾) | |
| CIRCLING | 580-1½ 550 (600-1½) | 580-2 550 (600-2) | 760-2½ 730 (800-2½) |

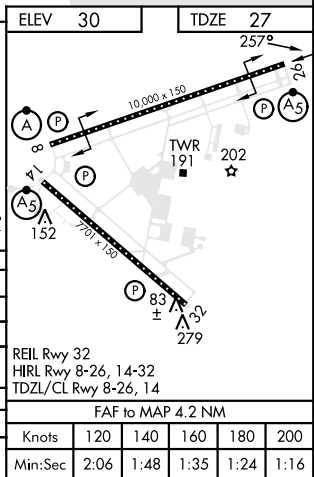

HI-ILS Z or LOC Z RWY 26