

WAAS CH <b>61133</b> <b>W18A</b>	APP CRS <b>179°</b>	Rwy Idg <b>5500</b> TDZE <b>883</b> Apt Elev <b>910</b>
--	------------------------	---


RNAV (GPS) RWY 18

SEDALIA RGNL (DMO)

**⚠** DME/DME RNP-0.3 NA. When local altimeter setting not received, use Whiteman AFB altimeter setting; increase all DA 46 feet and LNAV/VNAV visibility 1/8 mile; increase all MDA 60 feet and Cats C and D visibilities 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Whiteman AFB altimeter setting. Night Landing Rwy 5, 23 NA.

**MISSED APPROACH:**  
Climb to 2600 direct ZANGA and hold.

ASOS <b>120.525</b>	WHITEMAN APP CON* <b>127.45 284.0</b>	UNICOM <b>122.8 (CTAF) 0</b>
------------------------	--	---------------------------------

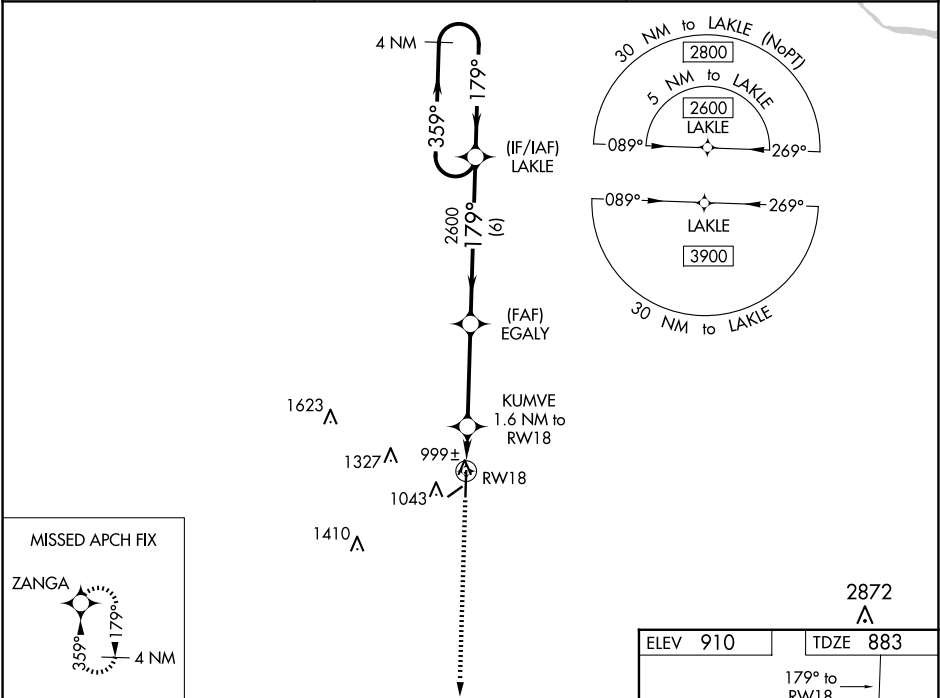

<div><div>2600</div><div>ZANGA</div></div> <div>*LNAV only</div>	<div><div>KUMVE 1.6 NM to RW18</div><div>EGALY 2600</div><div>LAKLE</div><div>4 NM Holding Pattern</div></div> <div><div>179°</div><div>359°</div><div>2600</div><div>GP 3.00° TCH 37</div></div>			
CATEGORY	A	B	C	D
LPV DA	1133-1		250 (300-1)	
LNAV/VNAV DA	1155-1		272 (300-1)	
LNAV MDA	1260-1		377 (400-1)	
CIRCLING	1360-1 450 (500-1)	1460-1 550 (600-1)	1640-2 730 (800-2)	1640-2 1/4 730 (800-2 1/4)

