RNAV (GPS) RWY 36

SEDALIA RGNL (DMO)

WAAS	APP CRS	Rwy Idg	5500
CH 60913	359°	TDZE	902
W36A		Apt Elev	910

T A DME/DME RNP-0.3 NA. When local altimeter setting not received, use Whiteman AFB altimeter setting: increase all DA 46 feet; increase all MDA 60 feet and LNAV visibility Cats C/D ⅛ mile, Circling Cats C/D ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Whiteman AFB altimeter setting. Helicopter visibility reduction below ¾ SM NA. Night Landing Rwy 5, 23 NA.

MISSED APPROACH: Climb to 2600 direct LAKLE and hold.

ASOS	WHITEMAN APP CON ★	UNICOM
120.525	127.45 284.0	122.8 (CTAF) L

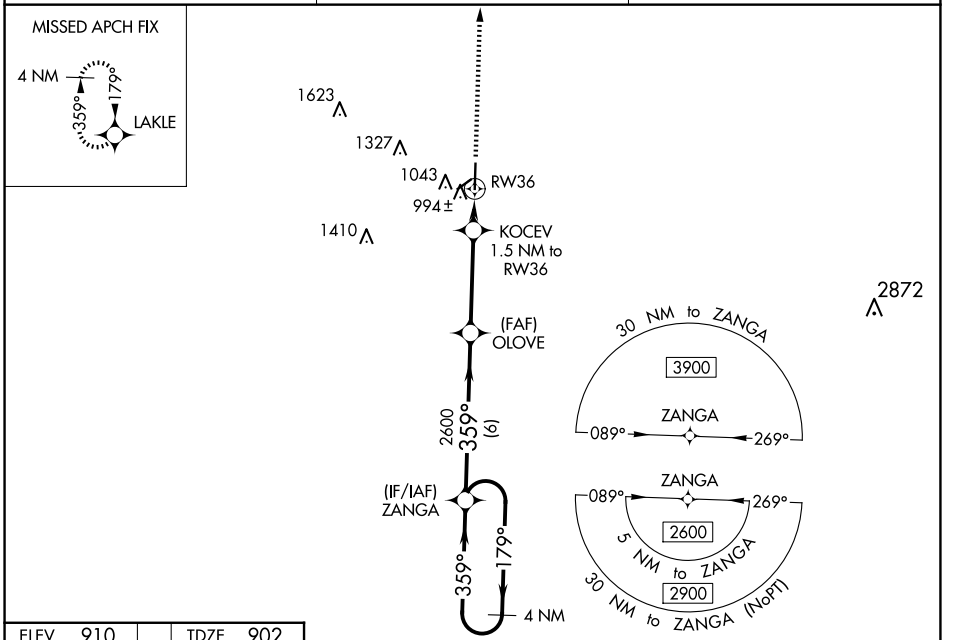

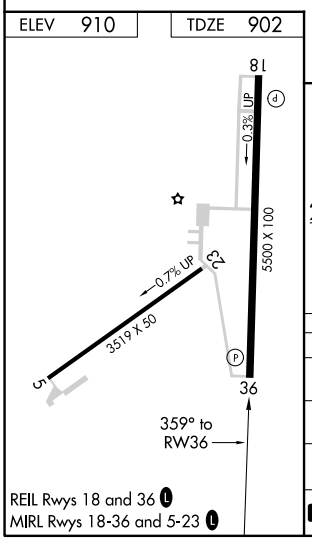

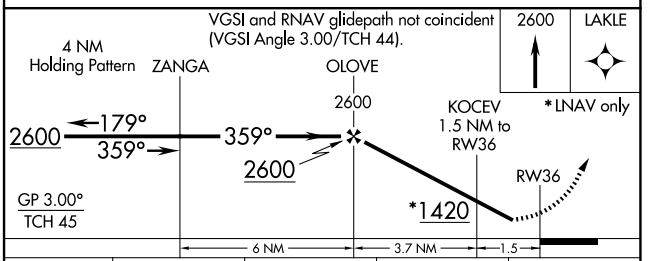

CATEGORY	A	B	C	D
LPV DA	1152-1 250 (300-1)			
LNAV/VNAV DA	1155-1 253 (300-1)			
LNAV MDA	1260-1 358 (400-1)			
C CIRCLING	1360-1 450 (500-1)	1460-1 550 (600-1)	1640-2 730 (800-2)	1640-2¼ 730 (800-2¼)

NC-3, 07 AUG 2025 to 04 SEP 2025
NC-3, 07 AUG 2025 to 04 SEP 2025