RNAV (GPS) RWY 11

FULTON COUNTY (RCR)

APP CRS	Rwy Idg	5001
108°	TDZE	790
	Apt Elev	790

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Goshen altimeter setting: increase all MDA 100 feet and visibility LNAV Cats C and D and Circling Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct LOWTO and hold.

AWOS-3	SOUTH BEND APP CON ★	UNICOM
118.775	132.05 257.8	122.7 (CTAF) L

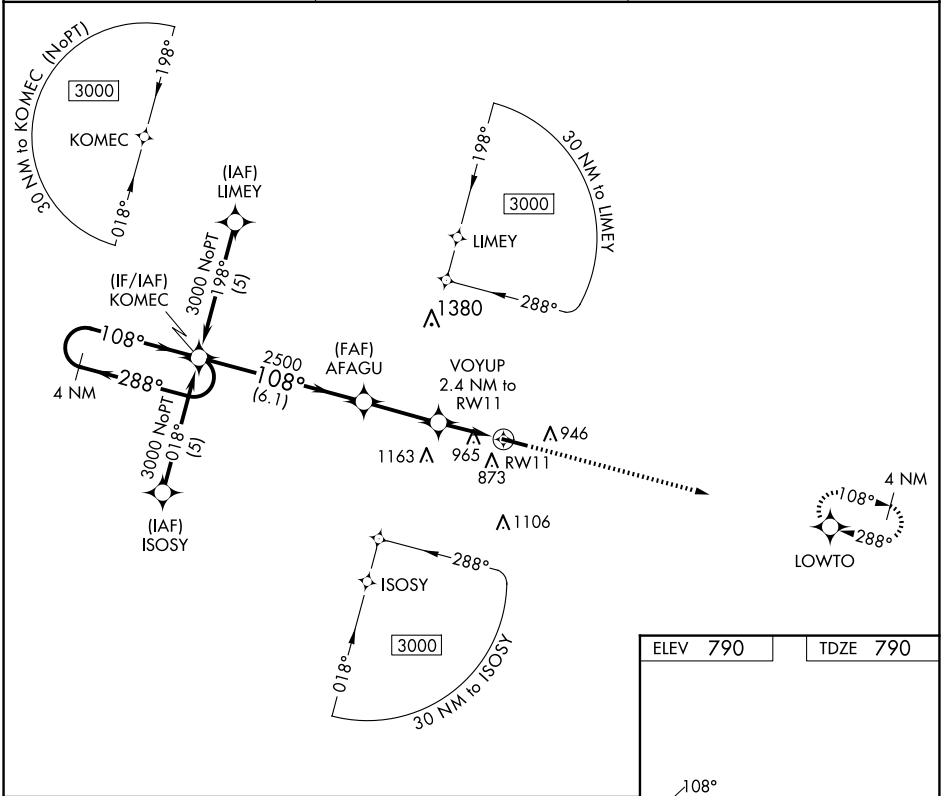

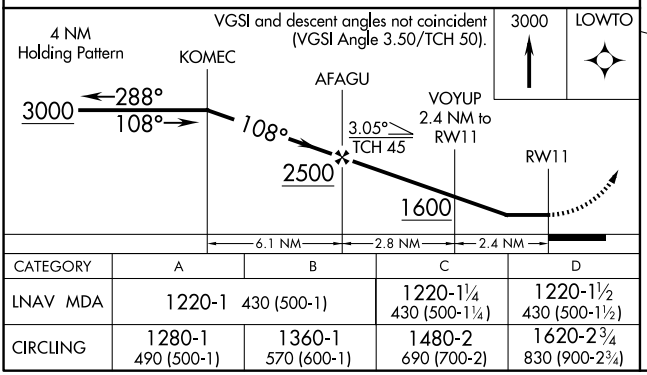

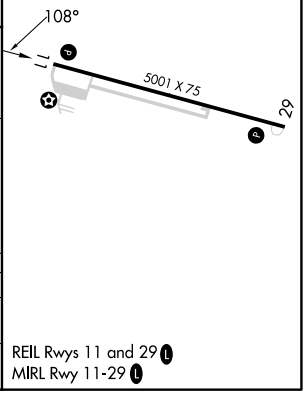

CATEGORY	A	B	C	D
LNAV MDA	1220-1 430 (500-1)		1220-1¼ 430 (500-1¼)	1220-1½ 430 (500-1½)
CIRCLING	1280-1 490 (500-1)	1360-1 570 (600-1)	1480-2 690 (700-2)	1620-2¾ 830 (900-2¾)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

EC-2, 07 AUG 2025 to 04 SEP 2025
EC-2, 07 AUG 2025 to 04 SEP 2025