

VOR/DME MOX	APP CRS	Rwy Idg	4899
109.6	315°	TDZE	1130
Chan 33		Apt Elev	1136

VOR RWY 32



MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

NA

VDP NA when using BBB altimeter setting. When local altimeter setting not received, use BBB altimeter setting and increase all MDAs 60 feet and increase S-32 visibility Cat C ½ SM and Circling visibility Cat C ¼ SM; increase JEXIR fix minimums S-32 and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 then left turn direct MOX VOR/DME and hold.

AWOS-3PT 118.6	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------------------	--------------------------

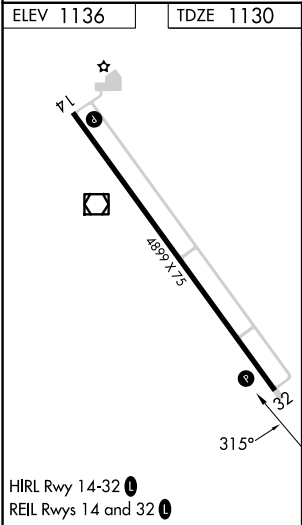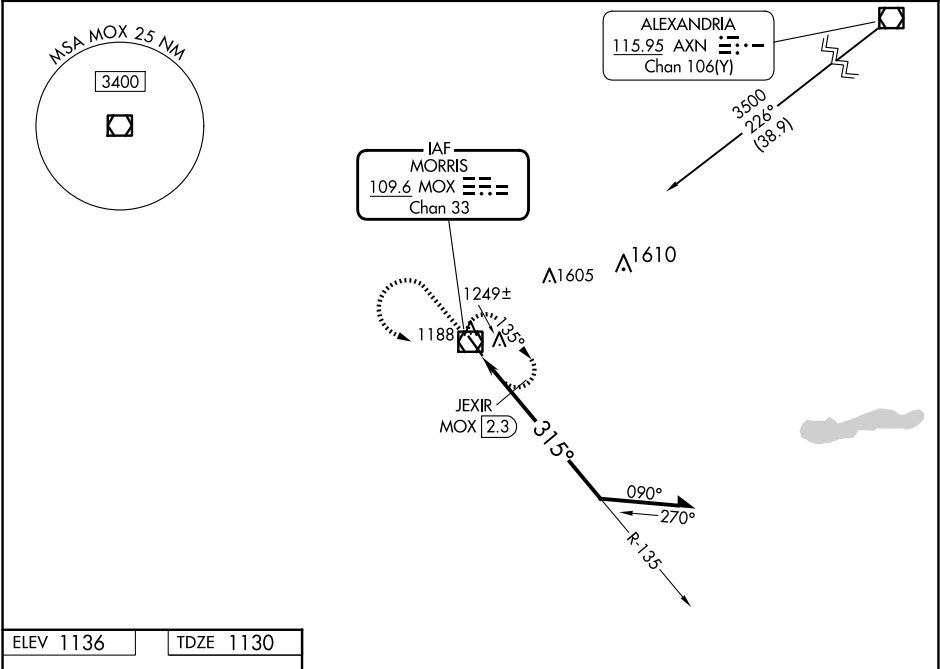

3000	MOX	MOX VOR/DME	Remain within 10 NM	
*1760 when using Benson altimeter setting.	JEXIR MOX 2.3	MOX MOX 1.7	2800	
	315°	1700*		
	1.1 NM	0.6 NM		
CATEGORY	A	B	C	D
S-32	1700-1	570 (600-1)	1700-1½ 570 (600-1½)	NA
CIRCLING	1700-1	564 (600-1)	1860-2 724 (800-2)	NA
JEXIR FIX MINIMUMS				
S-32	1500-1	370 (400-1)		NA
CIRCLING	1560-1 424 (500-1)	1600-1 464 (500-1)	1860-2 724 (800-2)	NA