RNAV (GPS) RWY 4

MARION COUNTY (MAO)

WAAS	APP CRS	Rwy Idg	4505
CH 40336	043°	TDZE	92
W04A		Apt Elev	92

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 53 feet and all visibilities ⅛ mile, increase all MDA 60 feet and all Cat C/D visibilities ¼ mile.

MISSED APPROACH: Climb to 2000 direct SEROY and hold.

AWOS-3PT	FLORENCE APP CON ★	UNICOM
119.875	135.25 316.15	122.8 (CTAF)

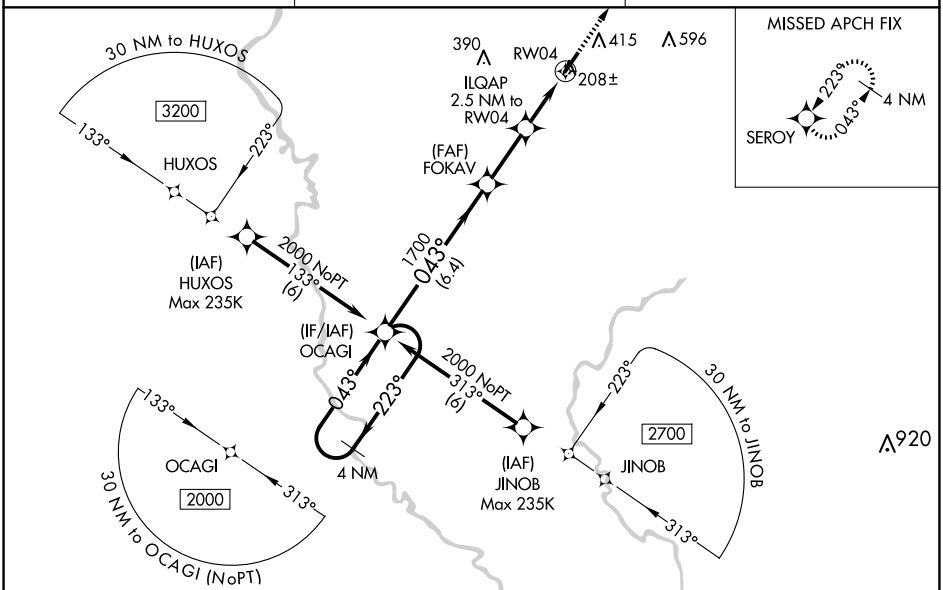

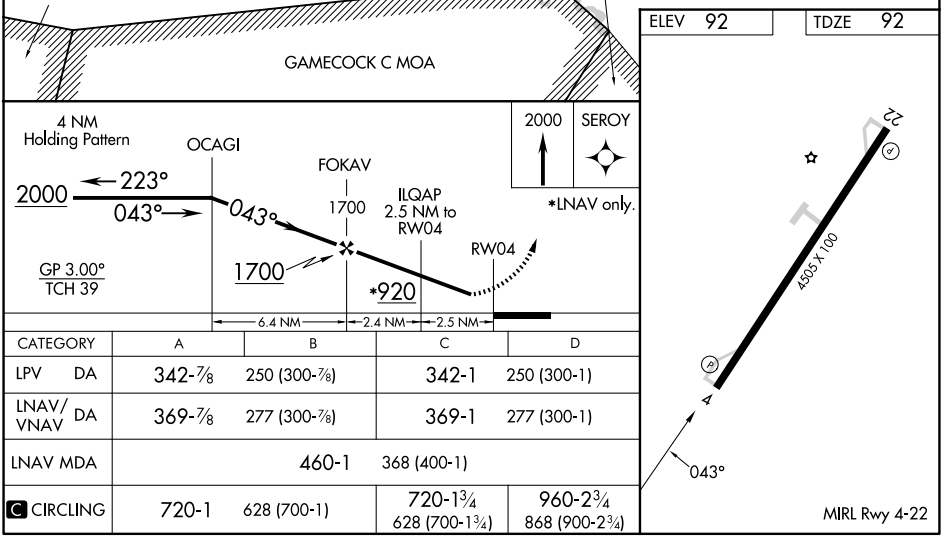

CATEGORY		A	B	C	D
LPV	DA	342-⅞	250 (300-⅞)	342-1	250 (300-1)
LNAV/VNAV	DA	369-⅞	277 (300-⅞)	369-1	277 (300-1)
LNAV MDA		460-1		368 (400-1)	
C CIRCLING		720-1	628 (700-1)	720-1¾ 628 (700-1¾)	960-2¾ 868 (900-2¾)

SE-2, 07 AUG 2025 to 04 SEP 2025
SE-2, 07 AUG 2025 to 04 SEP 2025