

**TOP ALTITUDE:
ASSIGNED BY ATC**


TAKEOFF MINIMUMS:
Rwys 7, 25: Standard with a minimum climb of 500' per NM to 1300.

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

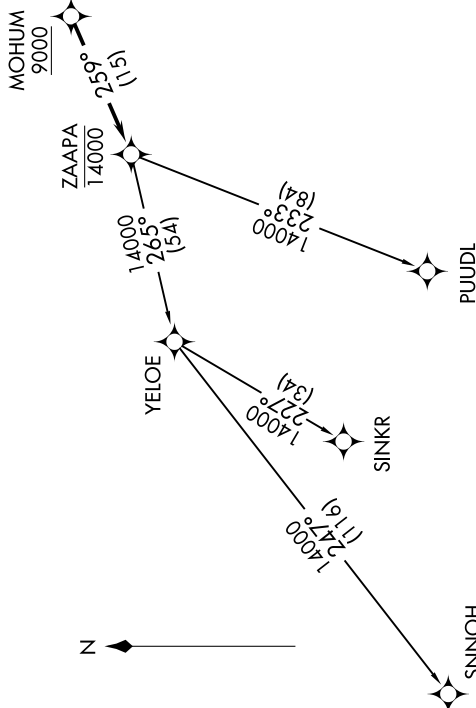

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 7: Climb on heading 073° to 1300, then on heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

TAKEOFF RUNWAY 25: Climb on heading 253° to 1300, then right turn heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

.....on track 259° to cross ZAAPA at or below 14000, then
on (transition). Maintain ATC assigned altitude,
expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA5.PUUDL)
SINKR TRANSITION (ZAAPA5.SINKR)
SNNOH TRANSITION (ZAAPA5.SNNOH)

ASOS
118.925
CLINC DEL
125.7
CTAF
122.7
CLEVELAND DEP CON
125.35 346.325

ZAAPA FIVE DEPARTURE (RNAV)

(ZAAPA5.ZAAPA) 26MAR20

LORAIN/ELYRIA, OHIO
LORAIN COUNTY RGNL (LPR)