


WAAS CH 70501 W28A	APP CRS 279°	Rwy Idg TDZE Apt Elev	2502 108 108
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

BLOCK ISLAND STATE (BID)

<p>▼ DME/DME RNP-0.3 NA. If local altimeter setting not received, use Westery State altimeter setting and increase all DAs/MDAs 40 feet. Baro-VNAV and</p> <p>▲ VDP NA when using Westery State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).</p>	<p>MISSED APPROACH: Climb to 1500 direct CUGDA and on track 287° to SUFOK and hold.</p>
---	--

AWOS-3PT 134.775	PROVIDENCE APP CON ★ 125.75 319.2	CLNC DEL 120.1	UNICOM 123.0 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

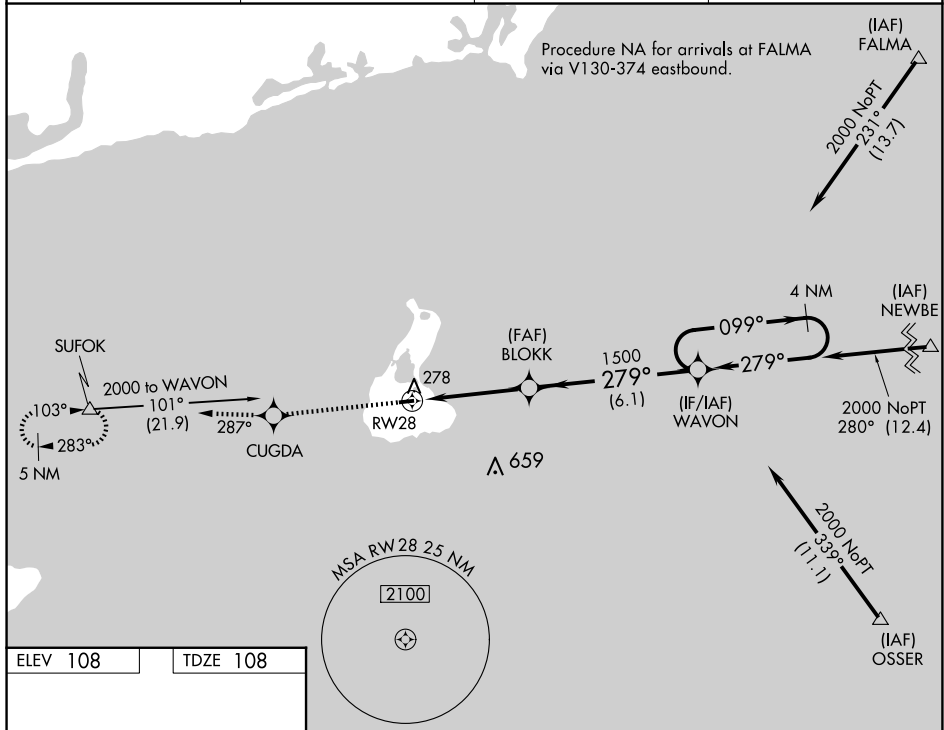

CATEGORY	A	B	C	D
LPV DA	358-1 250 (300-1)			NA
LNAV/ VNAV DA	570-1¾ 462 (500-1¾)			NA
LNAV MDA	540-1	432 (500-1)	540-1¼ 432 (500-1¼)	NA
CIRCLING	640-1	532 (600-1)	640-1½ 532 (600-1½)	NA

RNAV (GPS) RWY 28