

CTAF  
122.8  
HOUSTON DEP CON  
128.6 360.85

TOP ALTITUDE:  
ASSIGNED BY ATC

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.


TAKEOFF MINIMUMS  
Rwys 13, 31: Standard with minimum  
climb of 500' per NM to 560.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 13: Climb on heading 131° or as  
assigned by ATC for RADAR vectors to DREMR, thence . . .  
TAKEOFF RUNWAY 31: Climb on heading 311° or as  
assigned by ATC for RADAR vectors to DREMR, thence . . .

...on track 345° to LITLD, then on track 346° to BLTWY,  
then on (transition). Maintain ATC assigned altitude. Expect  
filed altitude 10 minutes after departure.

CRIED TRANSITION (BLTWY7.CRIED)

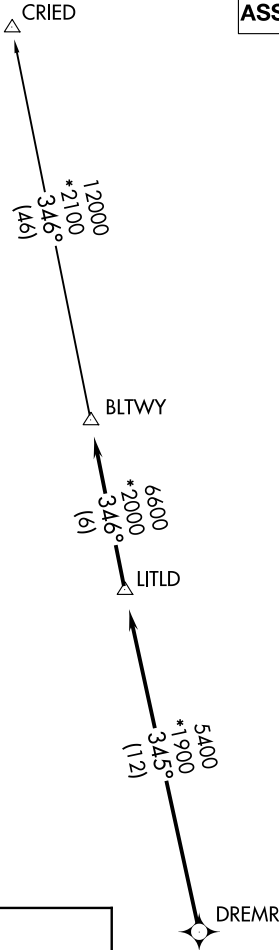

NOTE: Chart not to scale.