

WAAS CH <b>99710</b> <b>W32A</b>	APP CRS <b>319°</b>	Rwy Idg TDZE Apt Elev	<b>4000</b> <b>1039</b> <b>1039</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

BENSON MUNI (BBB)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 32 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Appleton altimeter setting. When local altimeter setting not received, use Appleton altimeter setting and increase all DA and MDA 40 feet.

MISSED APPROACH: Climb to 2700 direct DOSCA and hold.

AWOS-3PT <b>118.45</b>	MINNEAPOLIS CENTER <b>125.5 323.1</b>	UNICOM <b>122.8 (CTAF) 0</b>
---------------------------	--	---------------------------------

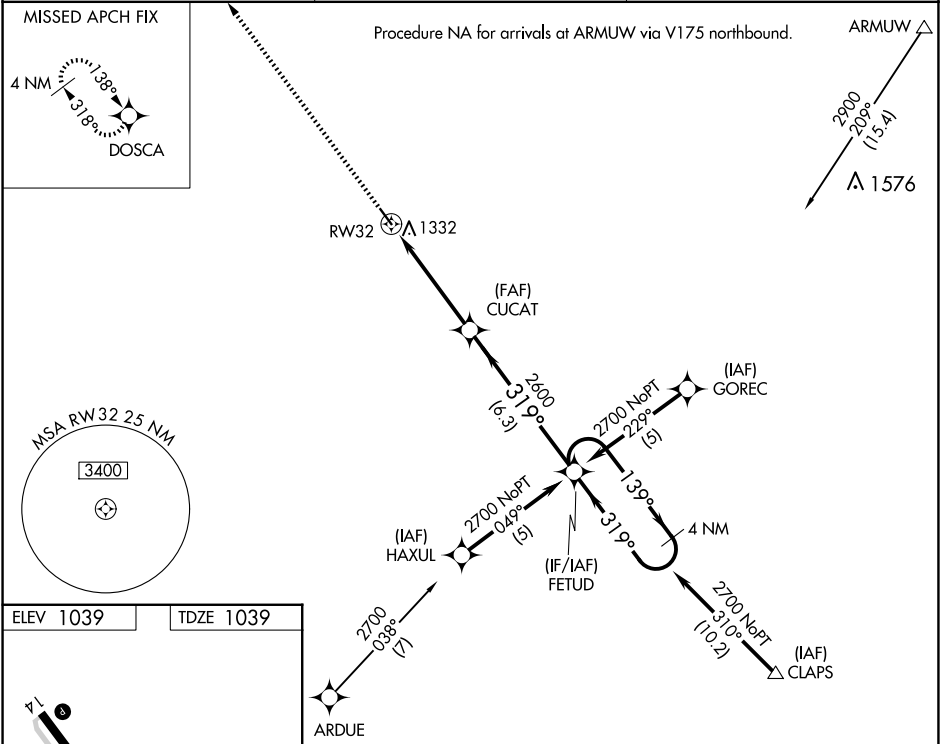

CATEGORY	A	B	C	D
LPV DA	1426-1½	387 (400-1½)	NA	
LNAV/VNAV DA	1710-2½	671 (700-2½)	NA	
LNAV MDA	1700-1	661 (700-1)	NA	

NC-1, 07 AUG 2025 to 04 SEP 2025

NC-1, 07 AUG 2025 to 04 SEP 2025