WAAS	APP CRS	Rwy Idg	3499
CH 77735	093°	TDZE	1198
W09A		Apt Elev	1198

RNAV (GPS) RWY 9
PORTAGE COUNTY (POV)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using CAK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not recieved, use CAK altimeter setting and increase LPV DA to 1498 feet. Increase LNAV/VNAV DA to 1557 feet. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct WHINR and hold, continue climb-in-hold to 4000.

AWOS-3	CLEVELAND APP CON ★	CLNC DEL	UNICOM
118.675	125.5 371.875	125.65	123.05 (CTAF) L

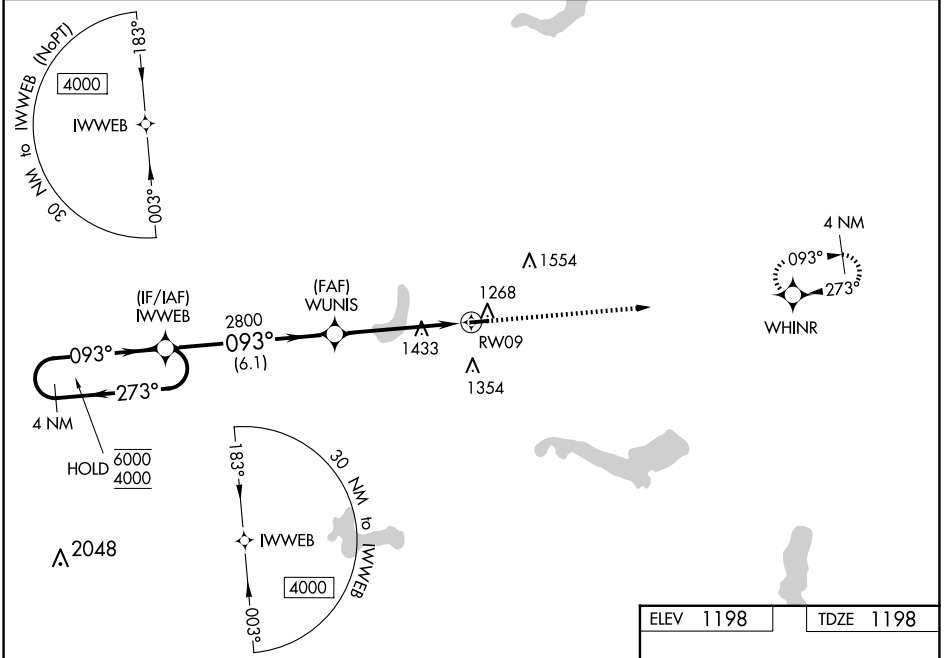

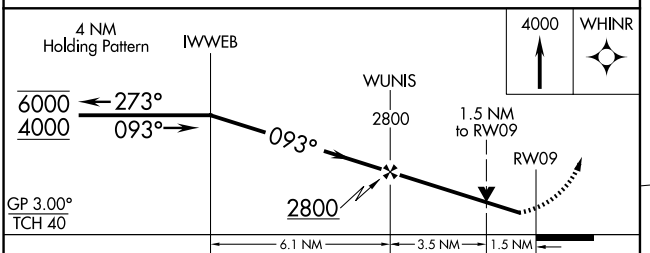

ELEV 1198 TDZE 1198

CATEGORY	A	B	C	D
LPV DA	1448-1 250 (300-1)			NA
LNAV/VNAV DA	1507-1 309 (400-1)			NA
LNAV MDA	1700-1 502 (600-1)		1700-1⅜ 502 (600-1⅜)	NA
C CIRCLING	1740-1 542 (600-1)	1800-1 602 (700-1)	1860-1¾ 662 (700-1¾)	NA

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

EC-2, 07 AUG 2025 to 04 SEP 2025
EC-2, 07 AUG 2025 to 04 SEP 2025